








Manually operated valves VHEF

FESTO



Characteristics



Innovative

- Small and compact for a wide range of pneumatic applications
- Numerous valve functions can be selected: 3/2-way and 5/2-way functions
- With flow rates of up to 1200 l/min, valves VHEF offer outstanding pneumatic performance for a wide range of applications
- Low weight
- Minimal actuating forces

Versatile

- Flexibility of the pneumatic working ports provides a practical solution to different requirements
- The 3/2-way valve can be used as normally closed (NC) or normally open (NO)
- Round silencer or ducted exhaust air
- Suitable for vacuum
- Reverse operation possible
- Pressure range from vacuum to 10 bar possible
- Version:
 - Pushbutton valve
 - Toggle lever valve
 - Finger lever valve
 - Hand lever valve, sideways
 - Hand lever valve
 - Selector valve, sideways
 - Selector valve


Reliable

- Durable thanks to tried-and-tested piston slide and disc seat valves
- Robust design: basic valve made from metal, cover made from plastic

Easy to install

- Mounted using mounting holes
- Front-panel mounting possible for nearly all valves (not possible for finger lever valve)

Characteristics

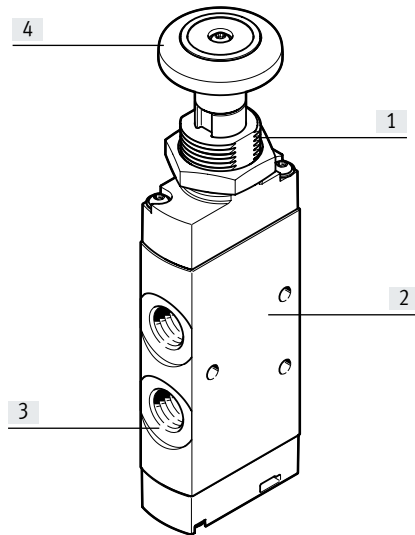

- [1] Front-panel mounting possible
- [2] Quick to mount: via retaining bracket or screwed in directly via through-hole
- [3] Practical connection with threaded connection or connecting pieces
- [4] Manually operated

Equipment options

Common features

- Mechanical spring
- Vacuum operation possible
- Reversible
- Directly actuated
- Ducted exhaust air

Differences

3/2-way valve monostable (M32)

- Normally open/closed (NO, NC)
- Non-detenting (monostable)
- bistable (B32)
- Detenting (bistable)

5/2-way valve monostable (M52)

- Resetting
- Non-detenting (monostable)
- bistable (B32)
- Detenting (bistable)

5/3-way valve detenting (B53C)

- Mid-position closed
- detenting (B53E)
- Mid-position exhausted

5/3-way valve non-detenting (P53C)

- Mid-position closed
- non-detenting (P53E)
- Mid-position exhausted

Valve selection

→ Internet: www.festo.com

You can order mechanically and manually operated directional control valves using the order code:



Ordering system for valves
→ Internet: vhf

Peripherals overview

Pushbutton valve, manually operated

3/2-way valve

5/2-way valve

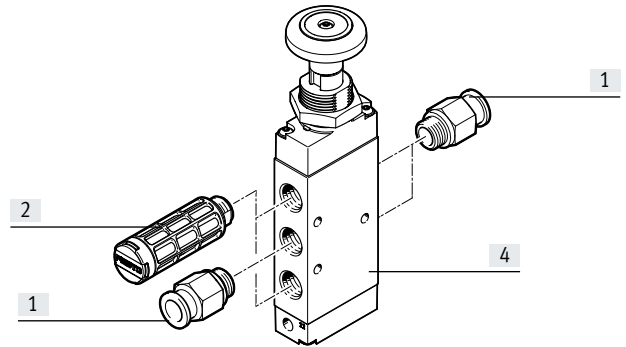
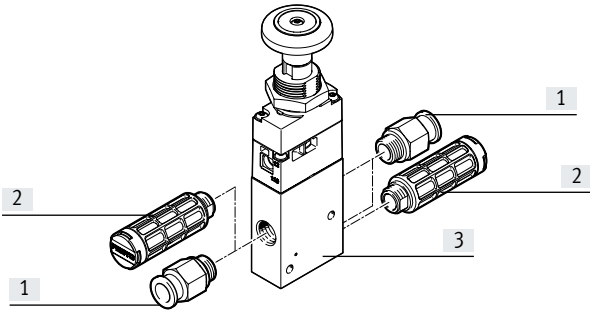


		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-PTC-M32... , VHEF-PTCZ-M32...	12
[4]	5/2-way valve	VHEF-P-M52...	13

Toggle lever valve, manually operated

3/2-way valve

5/2-way valve

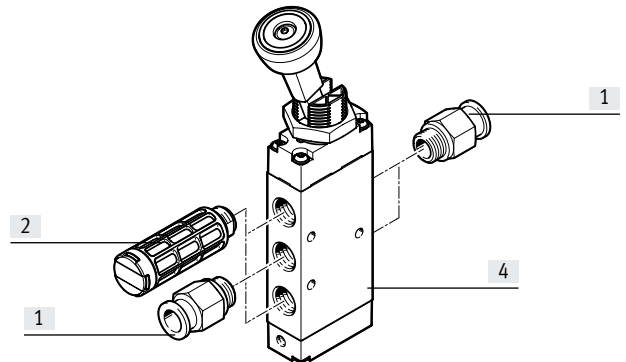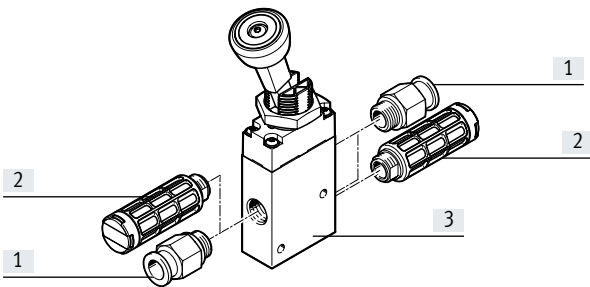



		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-VT-M32... , VHEF-VT-B32...	19
[4]	5/2-way valve	VHEF-V-M52... , VHEF-V-B52...	20

Peripherals overview

Finger lever valve, manually operated

3/2-way valve

5/2-way valve

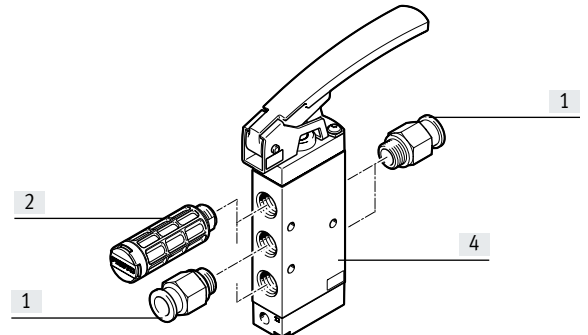
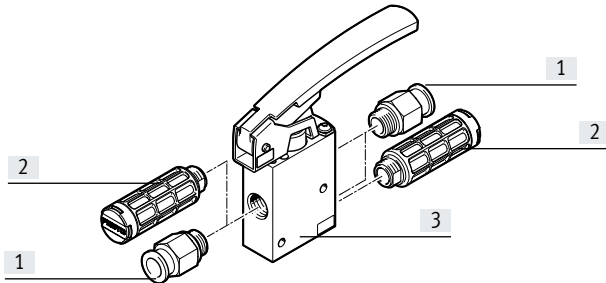


		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-LT-M32...	25
[4]	5/2-way valve	VHEF-L-M52...	26

Hand lever valve, sideways, manually operated

3/2-way valve

5/2-way valve, 5/3-way valve

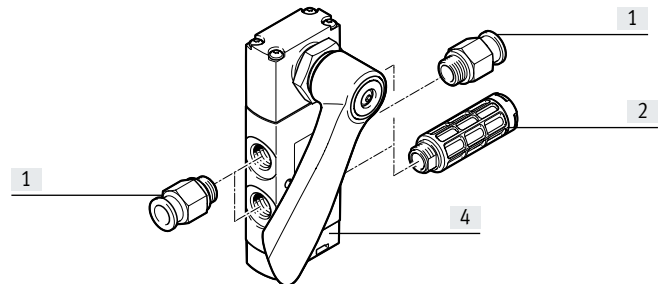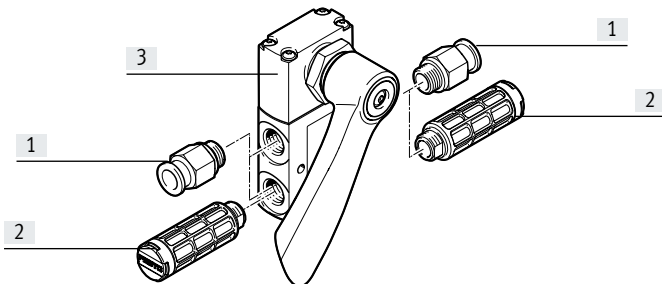



		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-HST...32...	30
[4]	5/2- or 5/3-way valve	VHEF-HS...52..., VHEF-HS...53...	31

Peripherals overview

Hand lever valve, manually operated

3/2-way valve

5/2-way valve, 5/3-way valve

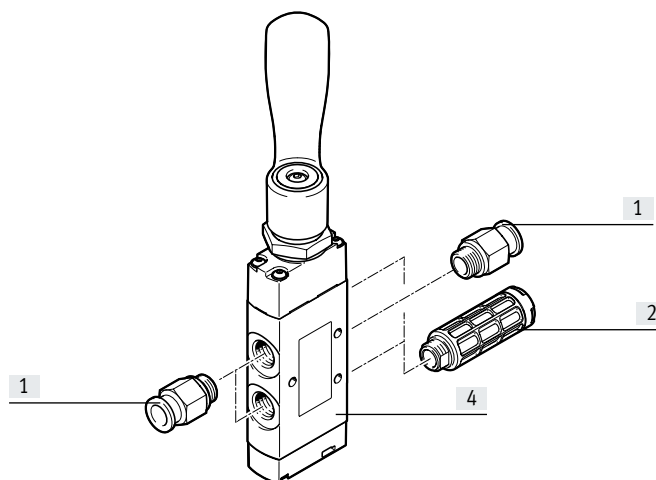
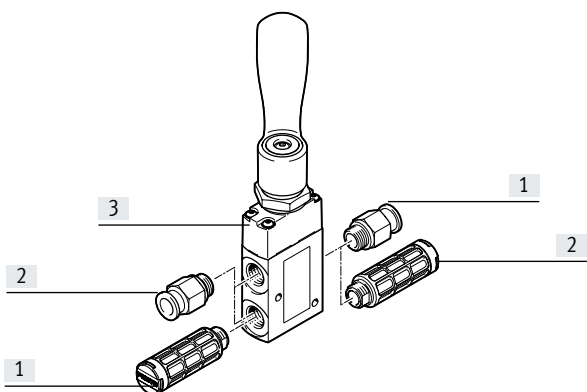


		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-HT...32...	35
[4]	5/2- or 5/3-way valve	VHEF-H...52..., VHEF-H...53...	36

Selector valve, sideways, manually operated

3/2-way valve

5/2-way valve, 5/3-way valve

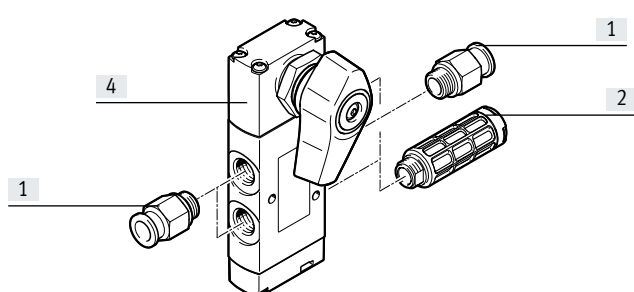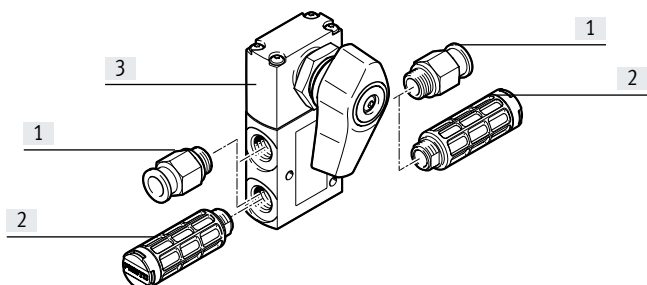


		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-EST...32...	41
[4]	5/2- or 5/3-way valve	VHEF-ES...52..., VHEF-ES...53...	42

Peripherals overview

Selector valve, manually operated

3/2-way valve

5/2-way valve, 5/3-way valve

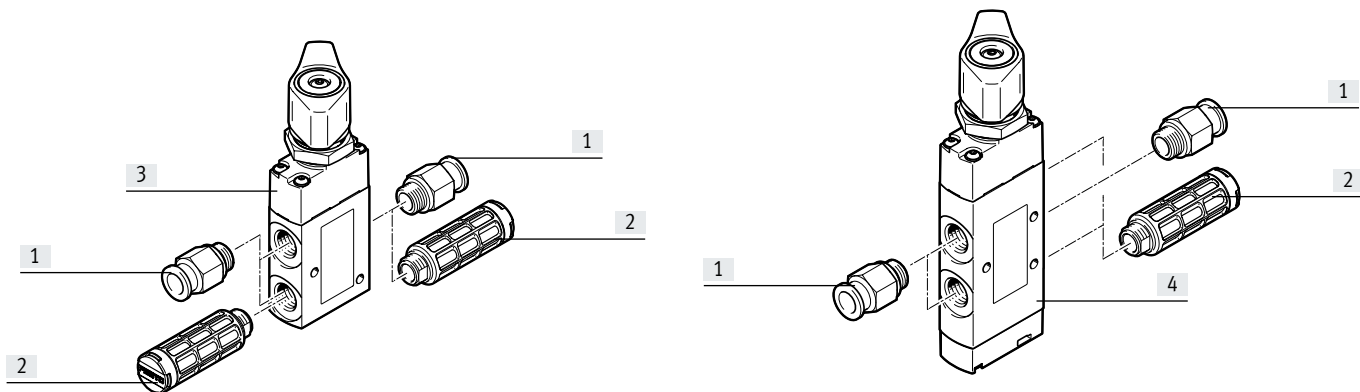

		Brief description	→ Page/Internet
[1]	Fitting	For supply air/exhaust ports (1, 3, 5) and working ports (2, 4)	52
[2]	Silencer	For exhaust ports (3, 5)	52
[3]	3/2-way valve	VHEF-ET...32...	46
[4]	5/2- or 5/3-way valve	VHEF-E...52..., VHEF-E...53...	47

Characteristics

Manually operated valves

Manually operated valves are used in all industrial sectors, as well as in the skilled trades. They are used to carry out simple processes such as clamping or closing safety doors.









Depending on the required actuation (pushing, rotating/swivelling or tilting), the valves are either resetting or non-resetting. The valves are directly or indirectly actuated.


Valve functions Circuit symbol	Type	Description
<p>Pushbutton valve</p>	VHEF-PTC-M32-M-...	<p>3/2-way valve, monostable</p> <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Pneumatically piloted, internal pilot air • Reversible
	VHEF-PTCZ-M32-M-...	<p>3/2-way valve, monostable</p> <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Suitable for vacuum • Pneumatically piloted, external pilot air • Reversible
	VHEF-PTC-B32-...	<p>3/2-way valve, bistable</p> <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Pneumatically piloted, internal pilot air • Reversible
	VHEF-PTCZ-B32-...	<p>3/2-way valve, bistable</p> <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Suitable for vacuum • Pneumatically piloted, external pilot air • Reversible
	VHEF-P-M52-M-...	<p>5/2-way valve, monostable</p> <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-P-B52-...	<p>5/2-way valve, bistable</p> <ul style="list-style-type: none"> • Suitable for vacuum • Reversible

Characteristics

Valve functions Circuit symbol	Type	Description
Toggle lever valve		
	VHEF-VT-M32-M...	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Pneumatically piloted, internal pilot air • Suitable for vacuum • Reversible
	VHEF-V-M52-M...	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-VT-B32-...	3/2-way valve, bistable <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Pneumatically piloted, internal pilot air • Suitable for vacuum • Reversible
	VHEF-V-B52-...	5/2-way valve, bistable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reversible
Finger lever valve		
	VHEF-LT-M32-M...	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Pneumatically piloted, internal pilot air • Suitable for vacuum • Reversible
	VHEF-L-M52-M...	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-L-M52-E...	5/2-way valve, monostable <ul style="list-style-type: none"> • Pneumatic spring return • Suitable for vacuum • Reversible

Characteristics

Valve functions Circuit symbol	Type	Description
Hand lever valve, selector valve 	VHEF-HST-M32-M-... VHEF-EST-M32-M-... VHEF-HT-M32-M-... VHEF-ET-M32-M-...	3/2-way valve, monostable <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-HST-B32-... VHEF-EST-B32-... VHEF-HT-B32-... VHEF-ET-B32-...	3/2-way valve, bistable <ul style="list-style-type: none"> • Normally closed (1 → 2) • Normally open (3 → 2) • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-HS-M52-M-... VHEF-ES-M52-M-... VHEF-H-M52-M-... VHEF-E-M52-M-...	5/2-way valve, monostable <ul style="list-style-type: none"> • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-HS-B52-... VHEF-ES-B52-... VHEF-H-B52-... VHEF-E-B52-...	5/2-way valve, bistable <ul style="list-style-type: none"> • Suitable for vacuum • Reversible
	VHEF-HS-B53C-... VHEF-ES-B53C-... VHEF-H-B53C-... VHEF-E-B53C-...	5/3-way valve <ul style="list-style-type: none"> • Mid-position closed • Suitable for vacuum • Reversible
	VHEF-HS-B53E-... VHEF-ES-B53E-... VHEF-H-B53E-... VHEF-E-B53E-...	5/3-way valve <ul style="list-style-type: none"> • Mid-position open (exhausted) • Suitable for vacuum • Reversible
	VHEF-HS-P53C-M-... VHEF-ES-P53C-M-... VHEF-H-P53C-M-... VHEF-E-P53C-M-...	5/3-way valve <ul style="list-style-type: none"> • Mid-position closed • Mechanical spring return • Suitable for vacuum • Reversible
	VHEF-HS-P53E-M-... VHEF-ES-P53E-M-... VHEF-H-P53E-M-... VHEF-E-P53E-M-...	5/3-way valve <ul style="list-style-type: none"> • Mid-position open (exhausted) • Mechanical spring return • Suitable for vacuum • Reversible

 **Note**

A filter must be installed upstream of valves operated in vacuum mode. This prevents any foreign matter in the intake air getting into the valve (e.g. when operating a suction cup with connector).

Type codes

001	Series
VHEF	Manually actuated valve

002	Actuation type
E	Selector switch
ES	Selector switch, on the side
H	Hand lever, top
HS	Hand lever, on the side
L	Finger lever
P	Pushbutton
V	Toggle lever, top

003	Design principle
	Piston spool
T	Poppet valve

004	Type of control
	Directly actuated
C	Indirectly actuated




005	Pilot air
	Internal
Z	External


006	Valve function
M32	3/2-way valve, normally closed or open
B32	3/2-way valve, double solenoid/bistable
M52	5/2-way valve, single solenoid/monostable
B52	5/2-way valve, double solenoid/bistable
P53E	5/3-way valve, mid-position exhausted
B53E	5/3-way valve, detenting, mid-position exhausted
P53C	5/3-way valve, mid-position closed
B53C	5/3-way valve, detenting, mid-position closed

007	Reset method for monostable/single solenoid valves
	None
E	Pneumatic spring, external
M	Mechanical spring

008	Pneumatic connection
G18	G1/8
G14	G1/4
N18	1/8 NPT
N14	1/4 NPT

Data sheet – Pushbutton valve

-  - Flow rate
750 ... 1200 l/min
-  - Pressure
-0.95 ... 10 bar
-  - Temperature range
-10 ... +60°C

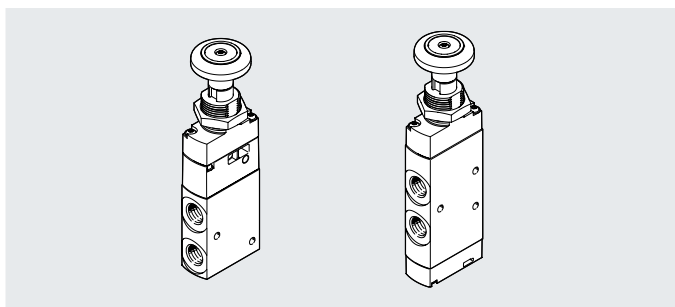

General technical data

Design	Pushbutton valve
Width [mm]	20
Note regarding use	Actuate manually only
Actuation type	Manual
Type of mounting	Via through-hole or front panel using retaining nut
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. switching frequency [Hz]	0.5

Technical data – 3/2-way valve

Type	VHEF-...-B32...18	VHEF-...-B32...14	VHEF-...-M32...18	VHEF-...-M32...14
Version	Disc seat valve			
Standard nominal flow rate 1 → 2 [l/min]	750	870	750	870
Standard nominal flow rate 3 → 2 [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	-		Mechanical spring	
Type of control	Piloted		Piloted	
Pilot air supply	Internal, external only PTCZ types		Internal, external only PTCZ types	
Manual override	Detenting		-	
Actuating force at 6 bar [N]	20	20	24.5	24.5
Release force at 6 bar [N]	25	25	-	-
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Pilot air port 12	-	-	M5 ¹⁾	M5 ¹⁾
Nominal width [mm]	5.6	6	5.6	6

1) Only for PTCZ types (external pilot air)

- - Note

- An axial torque greater than 3 Nm on the pushbutton is to be avoided. This could overload it and cause it to break.
- The max. operating force exerted on the pushbutton must not exceed 200 N in all directions. This could overload it and cause it to break.

Data sheet – Pushbutton valve

Technical data – 5/2-way valve				
Type	VHEF-P-B52-...18	VHEF-P-B52-...14	VHEF-P-M52-M-...18	VHEF-P-M52-M-...14
Version	Piston slide			
Standard nominal flow rate 1 → 2 [l/min]	750	1200	750	1200
Valve function	5/2-way valve, bistable		5/2-way valve, monostable	
Lap	Overlap		Overlap	
Reset method	–		Mechanical spring	
Type of control	Direct		Direct	
Manual override	Detenting		–	
Actuating force at 6 bar [N]	20		42	
Release force at 6 bar [N]	35		–	
Pneumatic connection 1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.2	7	5.2	7

**Note**

- An axial torque greater than 3 Nm on the pushbutton is to be avoided. This could overload it and cause it to break.
- The max. operating force exerted on the pushbutton must not exceed 200 N in all directions. This could overload it and cause it to break.

Materials

Housing	Anodised wrought aluminium alloy
Cover	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant

Data sheet – Pushbutton valve


Operating and environmental conditions		VHEF-PTC-M32-... VHEF-PTC-B32-...	VHEF-PTCZ-M32-... VHEF-PTCZ-B32-...	VHEF-P-...
Operating medium	Compressed air to ISO 8573-1:2010 [7:--:-]			
Note on operating/ pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)			
Operating pressure range [bar]	3.5 ... 10	-0.95 ... 10	-0.95 ... 10	
With internal/external pilot air	Internal	External	-	
NC valves [bar]	3.5 ... 10	3 ... 10	-	
NO valves [bar]	3.5 ... 10	3 ... 10	-	
Operating pressure range [psi]	51 ... 145	-14 ... 145	-14 ... 145	
With internal/external pilot air	Internal	External	-	
NC valves [psi]	51 ... 145	44 ... 145	-	
NO valves [psi]	51 ... 145	44 ... 145	-	
Pilot pressure range [bar]	3.5 ... 10	3 ... 10	-	
Temperature of medium [°C]	-10 ... +60			
Ambient temperature [°C]	-10 ... +60			
Corrosion resistance CRC ¹⁾	1			

1) Corrosion resistance class CRC 1 to Festo standard FN 940070
Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).


Pilot pressure p2 as a function of supply pressure p1

For disc seat valves VMEF-...-M32...
(normally closed, NC)

For disc seat valves VMEF-...-M32...
(normally open, NO)

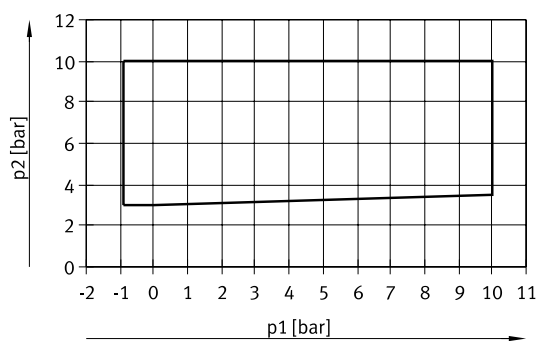

The framed area shows the operating range for external pilot air.

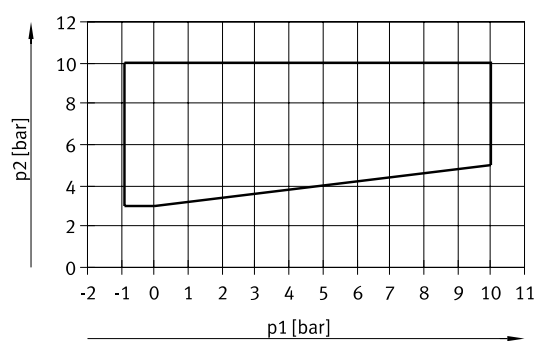


The framed area shows the operating range for external pilot air.

Data sheet – Pushbutton valve

Dimensions

3/2-way valve

Download CAD data → www.festo.com

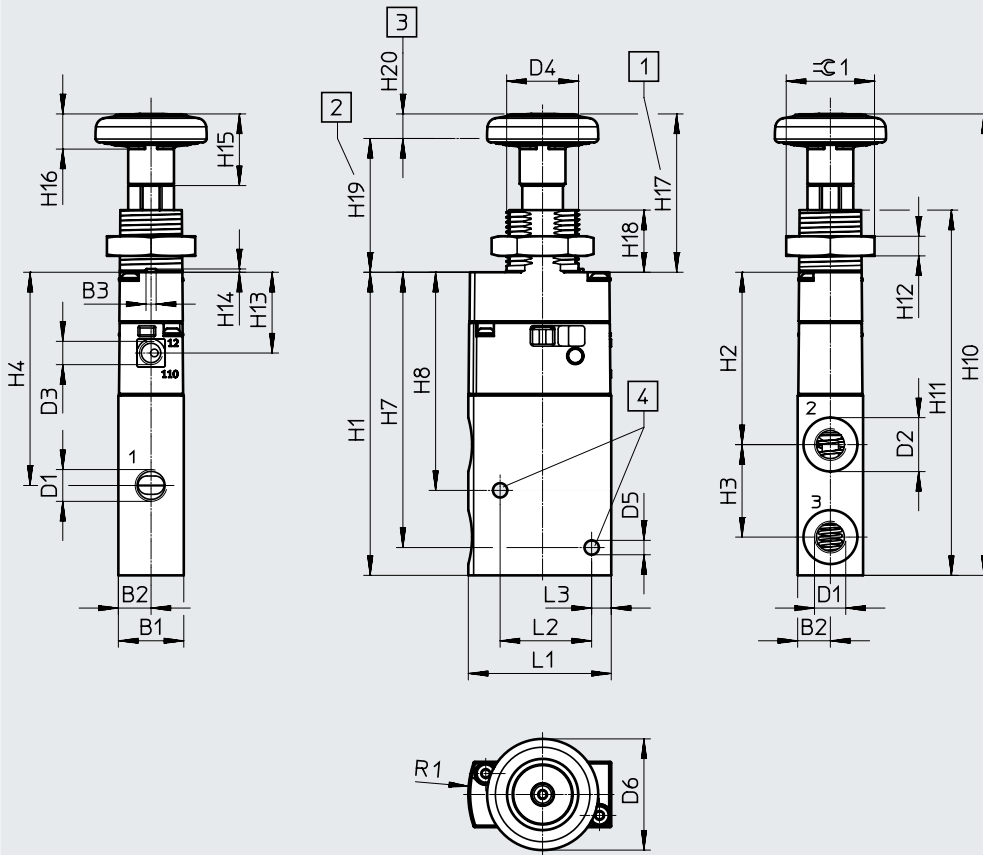

[1] Normal position

[2] Actuated position

[3] Valve stroke

[4] Mounting holes for screws M4

Type	B1	B2	B3	D1	D2 ∅	D3 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H7	H8	H10
VHEF-PTC-...32-...-G18	20	10	3.1	G1/8	16.5	-	M22x1.5	4.4	34	92.7	52.7	28.3	65.2	84.2	66.7	141.1
VHEF-PTCZ-...32-...-G18					M5											
VHEF-PTC-...32-...-G14				22	-											
VHEF-PTCZ-...32-...-G14					M5											


Type	H11	H12	H13	H14	H15	H16	H17	H18	H19	H20	L1	L2	L3	R1	±0.1
VHEF-PTC-...32-...-G18	111.7	6	24.7	1	21.9	10.7	48.4	19	40.9	7.5	43.7	28	6	30	27
VHEF-PTCZ-...32-...-G18															
VHEF-PTC-...32-...-G14															
VHEF-PTCZ-...32-...-G14															

Data sheet – Pushbutton valve

Dimensions

Download CAD data → www.festo.com

5/2-way valve, pneumatic connection G1/8

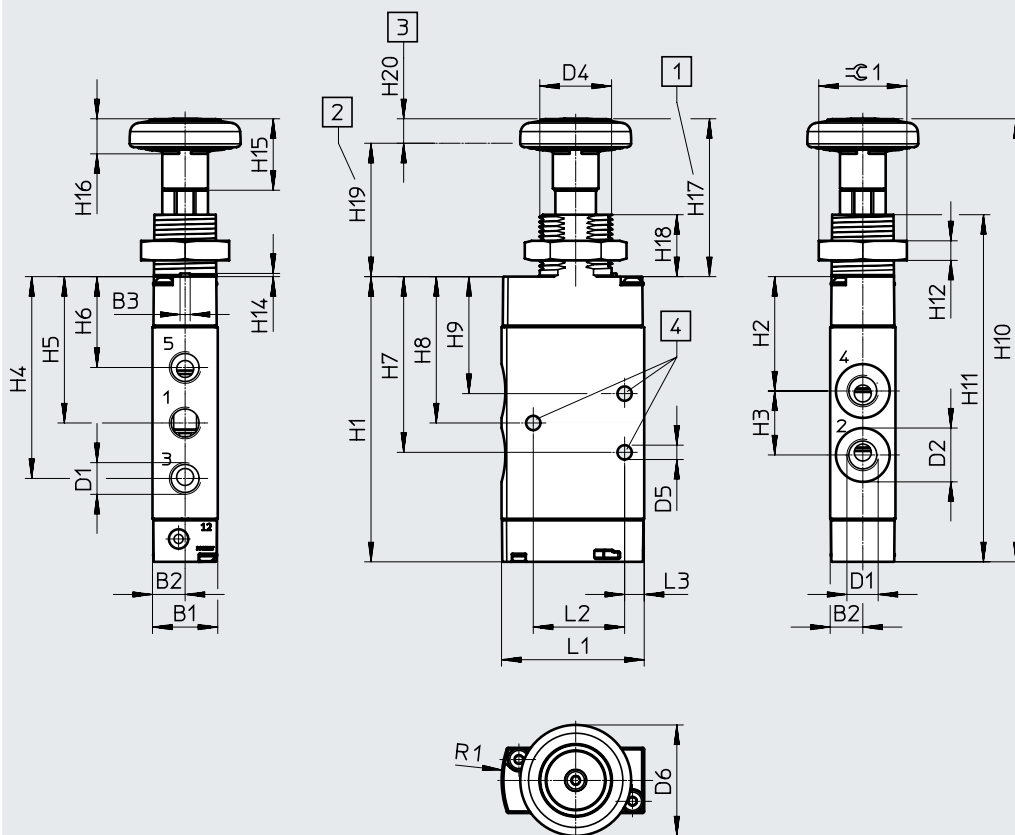

[1] Normal position

[2] Actuated position

[3] Valve stroke

[4] Mounting holes for screws M4

Type	B1	B2	B3	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6	H7	H8
VHEF-P-M52-M-G18	20	10	3.1	G1/8	16.5	M22x1.5	4.4	34	87.4	35.1	19.6	61.9	44.9	27.9	53.9	44.9
VHEF-P-B52-G18																


Type	H9	H10	H11	H12	H14	H15	H16	H17	H18	H19	H20	L1	L2	L3	R1	≙ 1
VHEF-P-M52-M-G18	35.9	135.8	106.4	6	1	21.9	10.7	48.4	19	40.9	7.5	43.7	28	6	30	27
VHEF-P-B52-G18																

Data sheet – Pushbutton valve

Dimensions

Download CAD data → www.festo.com

5/2-way valve, pneumatic connection G1/4

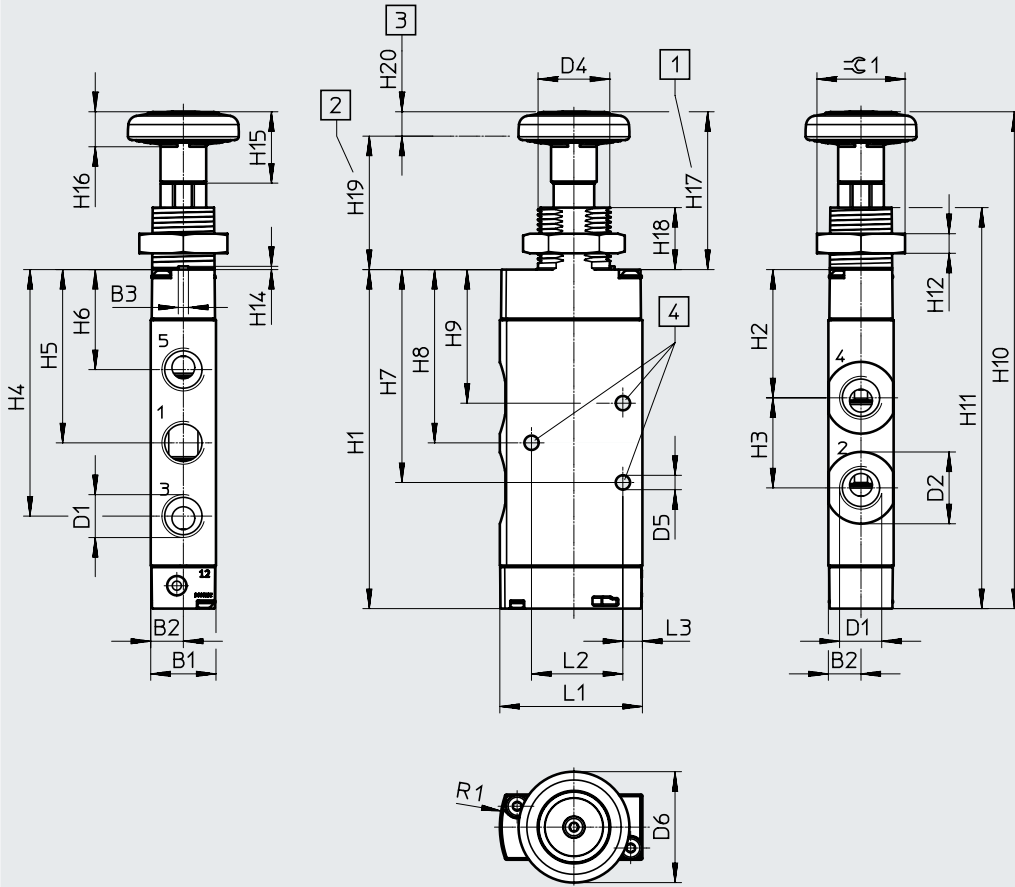

[1] Normal position

[2] Actuated position

[3] Valve stroke

[4] Mounting holes for screws M4




Type	B1	B2	B3	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6	H7	H8
VHEF-P-M52-M-G14	20	10	3.1	G1/4	22	M22x1.5	4.4	34	103.9	39.3	27.6	75.6	53.1	30.7	65.3	53.1
VHEF-P-B52-G14																


Type	H9	H10	H11	H12	H14	H15	H16	H17	H18	H19	H20	L1	L2	L3	R1	≅ 1
VHEF-P-M52-M-G14	41	152.3	122.9	6	1	21.9	10.7	48.4	19	40.9	7.5	43.7	28	6	30	27
VHEF-P-B52-G14																

Data sheet – Pushbutton valve

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	168	5299707	VHEF-PTC-B32-G18
		870	161	5299713	VHEF-PTC-B32-G14
	Mechanical spring	750	168	5299705	VHEF-PTC-M32-M-G18
		870	161	5299711	VHEF-PTC-M32-M-G14
	–	750	168	5299708	VHEF-PTCZ-B32-G18
		870	161	5299714	VHEF-PTCZ-B32-G14
	Mechanical spring	750	168	5299706	VHEF-PTCZ-M32-M-G18
		870	161	5299712	VHEF-PTCZ-M32-M-G14
5/2-way valve	–	750	182	5299710	VHEF-P-B52-G18
	Mechanical spring		182	5299709	VHEF-P-M52-M-G18
	–	1200	215	5299716	VHEF-P-B52-G14
	Mechanical spring		215	5299715	VHEF-P-M52-M-G14

Data sheet – Toggle lever valve

-  Flow rate
750 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

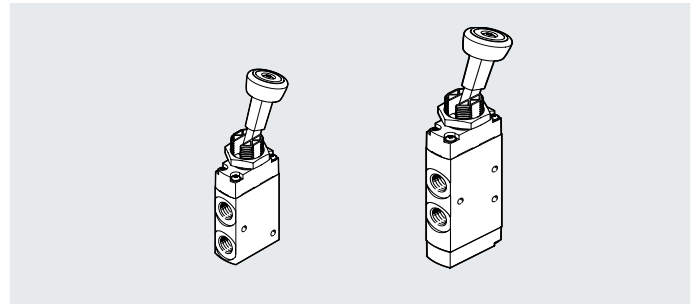**General technical data**

Design	Toggle lever, at the top
Width [mm]	20
Note regarding use	Actuate manually only
Actuation type	Manual
Type of mounting	Via through-hole or front panel using retaining nut
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. switching frequency [Hz]	0.5

Technical data – 3/2-way valve

Type	VHEF-VT-B32...18	VHEF-VT-B32...14	VHEF-VT-M32...18	VHEF-VT-M32...14
Version	Disc seat valve			
Standard nominal flow rate $\frac{1 \rightarrow 2}{3 \rightarrow 2}$ [l/min]	750	870	750	870
Standard nominal flow rate $\frac{1 \rightarrow 2}{3 \rightarrow 2}$ [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	-		Mechanical spring	
Type of control	Direct		Direct	
Manual override	Detenting		-	
Actuating torque at 6 bar [Nm]	1.6	1.6	0.6	0.6
Release torque at 6 bar [Nm]	0.8	0.8	-	-
Max. force on actuation [N]	200	200	200	200
Max. lateral force on actuation [N]	140	140	140	140
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.6	6	5.6	6

Data sheet – Toggle lever valve

Technical data – 5/2-way valve		VHEF-V-B52-...18	VHEF-V-B52-...14	VHEF-V-M52-M-...18	VHEF-V-M52-M-...14
Type					
Version		Piston slide			
Standard nominal flow rate	1 → 2 [l/min]	750	1200	750	1200
Valve function		5/2-way valve, bistable		5/2-way valve, monostable	
Lap		Overlap		Overlap	
Reset method		–		Mechanical spring	
Type of control		Direct		Direct	
Manual override		Detenting		–	
Actuating torque at 6 bar	[Nm]	1.1	1.1	0.6	0.6
Release torque at 6 bar	[Nm]	0.6	0.6	–	–
Max. force on actuation	[N]	200	200	200	200
Max. lateral force on actuation	[N]	140	140	140	140
Pneumatic connection		G1/8	G1/4	G1/8	G1/4
1, 2, 3, 4, 5					
Nominal width	[mm]	5.2	7	5.2	7

Materials	
Housing	Anodised wrought aluminium alloy
Cover	Reinforced PA
Lever	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure range	[bar] –0.95 ... 10 [psi] –14 ... 145
Temperature of medium	[°C] –10 ... +60
Ambient temperature	[°C] –10 ... +60
Corrosion resistance CRC ¹⁾	1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070


Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Toggle lever valve

Dimensions

3/2-way valve

Download CAD data → www.festo.com

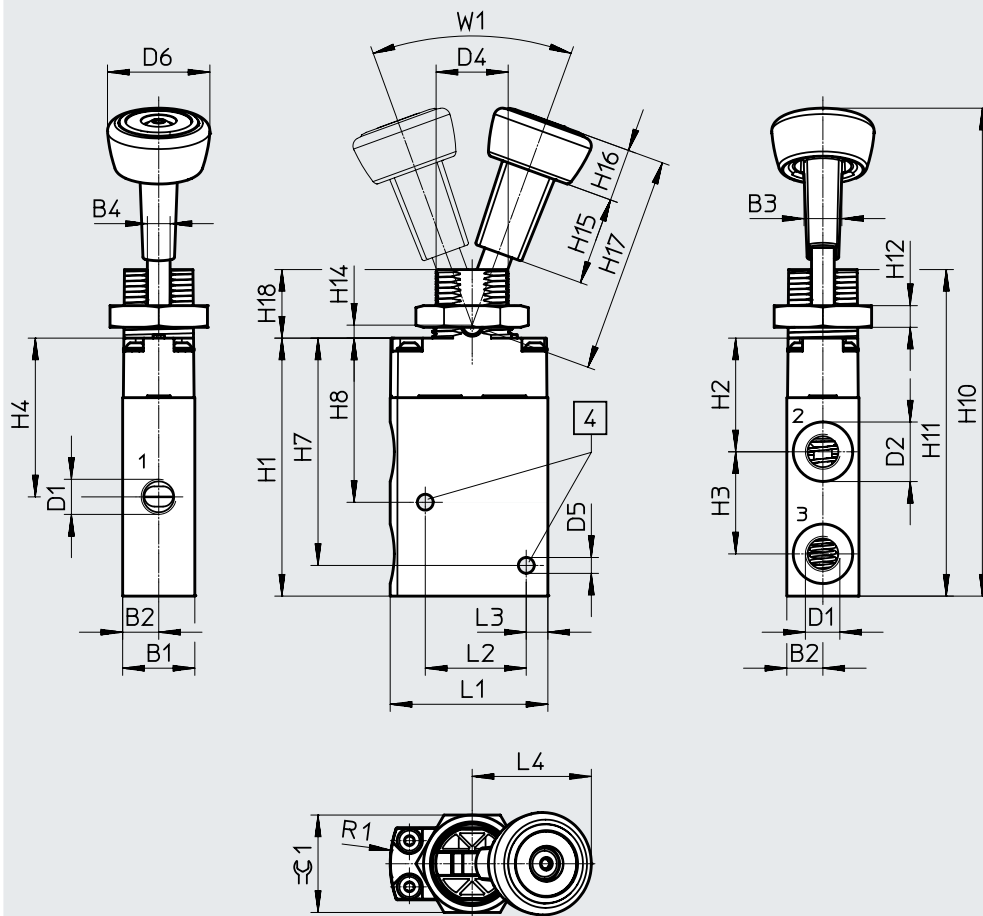

[4] Mounting holes for screws M4

Type	B1	B2	B3	B4	D1	D2 ø	D4	D5 ø	D6 ø	H1	H2	H3	H4	H7	H8	H10
VHEF-VT...M32...-G18	20	10	10.5	6.3	G1/8	16.5	M22x1.5	4.4	28.4	71.4	31.5	28.3	44	63	45.5	135.2
VHEF-VT...M32...-G14					G1/4	22										
VHEF-VT...B32...-G18					G1/8	16.5										
VHEF-VT...B32...-G14					G1/4	22										


Type	H11	H12	H14	H15	H16	H17	H18	L1	L2	L3	L4	R1	W1	≈ \ominus 1
VHEF-VT...M32...-G18	90.5	6	3.6	24.4	14.6	60	19	43.7	28	6	33	30	40°	27
VHEF-VT...M32...-G14														
VHEF-VT...B32...-G18														
VHEF-VT...B32...-G14														

Data sheet – Toggle lever valve

Dimensions

Download CAD data → www.festo.com

5/2-way valve, pneumatic connection G1/8

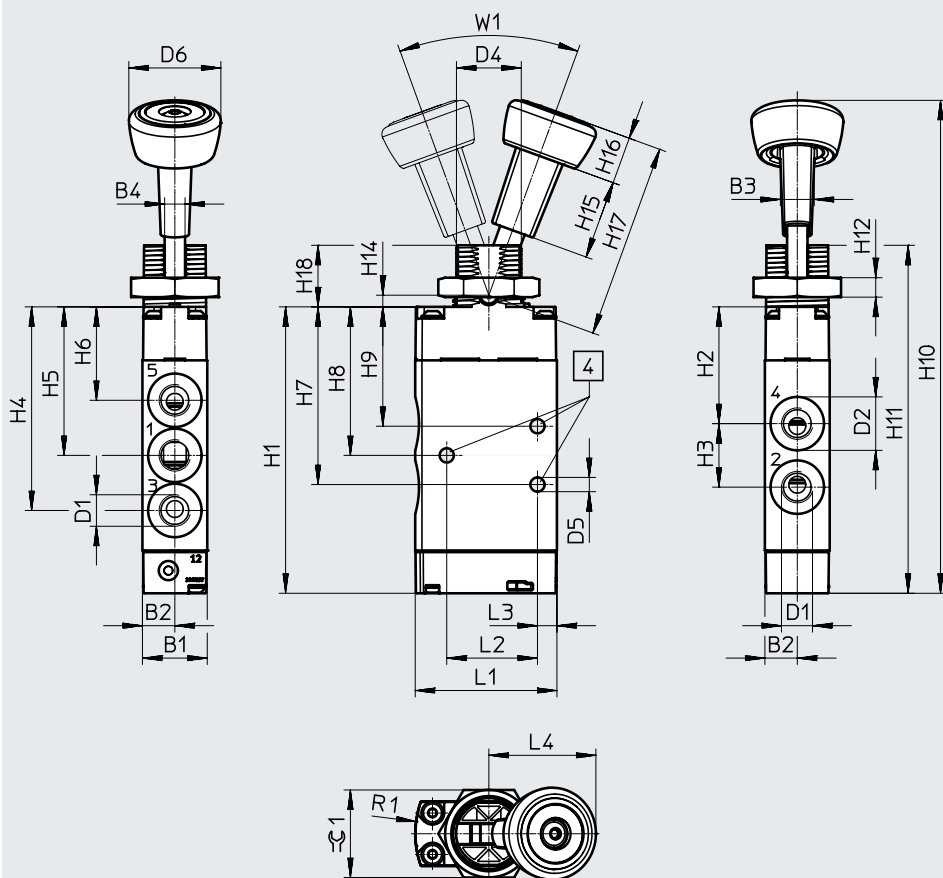

[4] Mounting holes for screws M4

Type	B1	B2	B3	B4	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6	H7
VHEF-V-M52-M-G18	20	10	10.5	6.3	G1/8	16.5	M22x1.5	4.4	28.4	88.4	36.1	19.6	62.9	45.9	28.9	54.9
VHEF-V-B52-G18																


Type	H8	H9	H10	H11	H12	H14	H15	H16	H17	H18	L1	L2	L3	L4	R1	W1	≈ 1
VHEF-V-M52-M-G18	45.9	36.9	152.1	107.4	6	3.6	24.4	14.6	60	19	43.7	28	6	33	30	40°	27
VHEF-V-B52-G18																	

Data sheet – Toggle lever valve

Dimensions

Download CAD data → www.festo.com

5/2-way valve, pneumatic connection G1/4

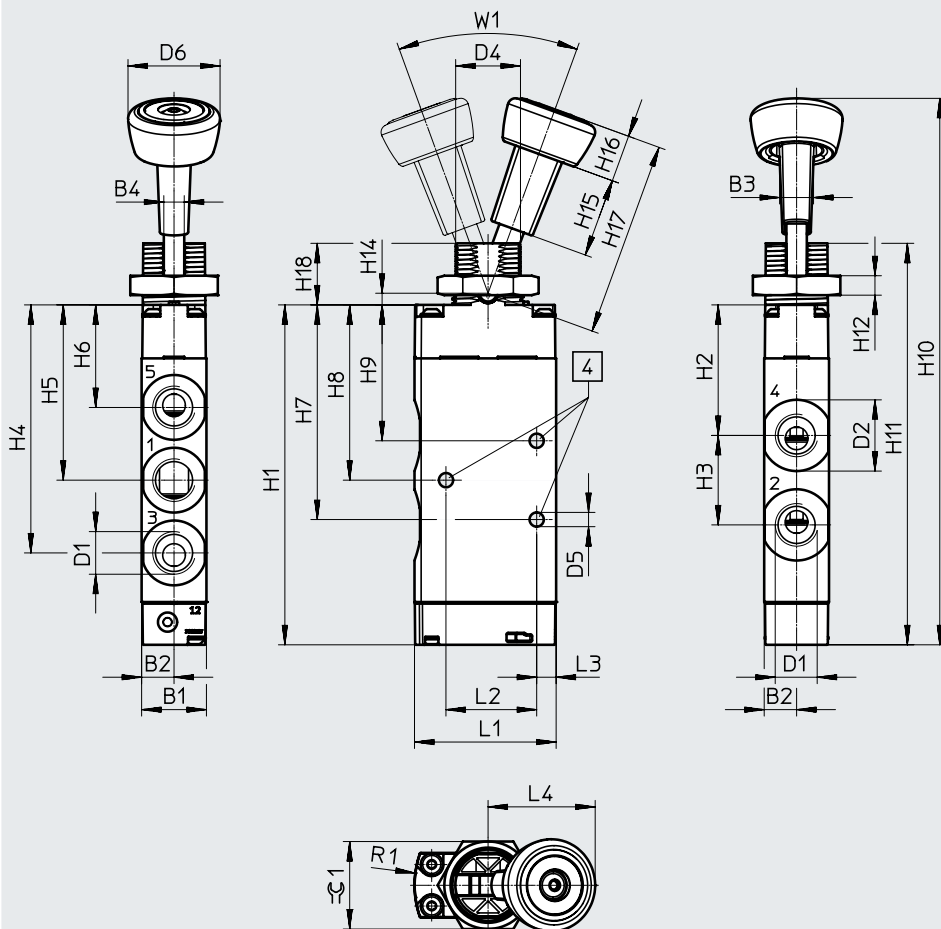

[4] Mounting holes for screws M4




Type	B1	B2	B3	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6	H7	H8
VHEF-V-M52-M-G14	20	10	10.5	G1/4	22	M22x1.5	4.4	28.4	104.9	40.3	27.6	76.6	54.1	31.7	66.3	54.1
VHEF-V-B52-G14																


Type	H9	H10	H11	H12	H14	H15	H16	H17	H18	L1	L2	L3	L4	R1	W1	≈ 1
VHEF-V-M52-M-G14	42	168.6	123.9	6	3.6	24.4	14.6	60	19	43.7	28	6	33	30	40°	27
VHEF-V-B52-G14																

Data sheet – Toggle lever valve

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	174	5300037	VHEF-VT-B32-G18
		870	181	5300039	VHEF-VT-B32-G14
	Mechanical spring	750	174	5300036	VHEF-VT-M32-M-G18
		870	181	5300038	VHEF-VT-M32-M-G14
5/2-way valve	–	750	208	5300033	VHEF-V-B52-G18
		1200	240	5300035	VHEF-V-B52-G14
	Mechanical spring	750	208	5300032	VHEF-V-M52-M-G18
		1200	240	5300034	VHEF-V-M52-M-G14

Data sheet – Finger lever valve

-  Flow rate
750 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

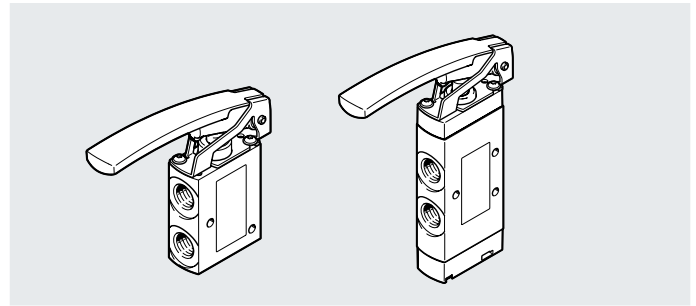**General technical data**

Design	Finger lever
Width [mm]	20
Type of control	Directly actuated
Note regarding use	Actuate manually only
Actuation type	Manual
Type of mounting	With through-hole
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. switching frequency [Hz]	0.5

Technical data – 3/2-way valve

Type	VHEF-LT-M32-M...18	VHEF-LT-M32-M...14
Version	Disc seat valve	
Standard nominal flow rate [l/min] 1 → 2	750	870
Valve function	3/2-way valve, open/closed, monostable	
Lap	Zero overlap	
Reset method	Mechanical spring	
Actuating force at 6 bar		
• Normally closed [N]	14	14
• Normally open [N]	24	24
Pneumatic connection 1, 2, 3	G1/8	G1/4
Nominal width [mm]	5.6	6

Data sheet – Finger lever valve

Technical data – 5/2-way valve				
Type	VHEF-L-M52-M...18	VHEF-L-M52-M...14	VHEF-L-M52-E...18	VHEF-L-M52-E...14
Version	Piston slide		Piston slide	
Standard nominal flow rate 1 → 2 [l/min]	750	1200	750	1200
Valve function	5/2-way valve, monostable		5/2-way valve, monostable	
Lap	Overlap		Overlap	
Reset method	Mechanical spring		Pneumatic spring	
Actuating force at 6 bar [N]	10	12	8	14
Pneumatic connection 1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.2	7	5.2	7

Materials	
Housing	Anodised wrought aluminium alloy
Lever	Reinforced PA
Cover	Reinforced PA (VHEF...M52)
Seal	NBR
Note on materials	RoHS-compliant

Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:--]
Note on operating/ pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure range	[bar]
	[psi]
Temperature of medium [°C]	-10 ... +60
Ambient temperature [°C]	-10 ... +60
Corrosion resistance CRC ¹⁾	1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070


Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Finger lever valve

Dimensions

Download CAD data → www.festo.com

3/2-way valve

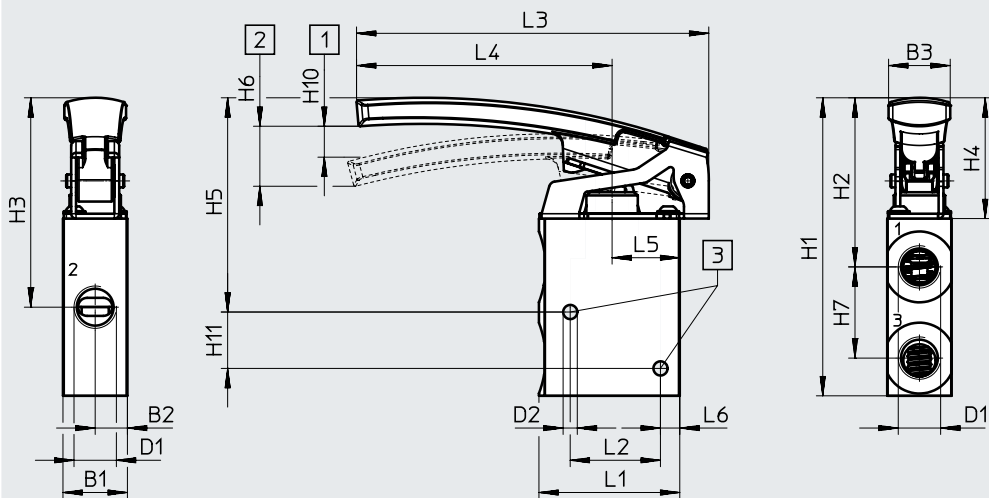

[1] Start of opening

[2] Maximum stroke

[3] Mounting holes for screws M4

Type	B1	B2	B3	D1	D2 ∅	L1	L2	L3	L4	L5
VHEF-LT-M32-M-G14	20	10	19.1	G1/4	4.4	43.7	28	109.3	79.3	21
VHEF-LT-M32-M-G18				G1/8						


Type	L6	H1	H2	H3	H4	H5	H6	H7	H10	H11
VHEF-LT-M32-M-G14	6	92.5	52.5	65	37.5	66.5	18.6	28.3	6.3	17.5
VHEF-LT-M32-M-G18										

Data sheet – Finger lever valve

Dimensions

5/2-way valve

Download CAD data → www.festo.com

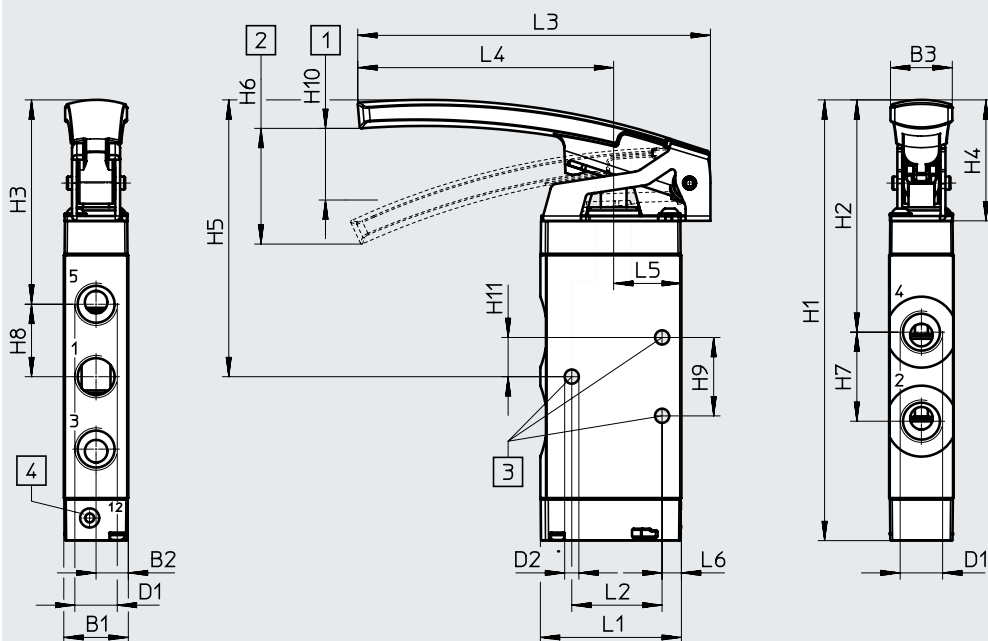

[1] Start of opening

[2] Maximum stroke

[3] Mounting holes for screws M4

[4] Port 12: pneumatic spring, M5
(for VHEF-L-M52-E-...)

Type	B1	B2	B3	D1	D2 ∅	L1	L2	L3	L4	L5	L6
VHEF-L-M52-M-G18	20	10	19.1	G1/8	4.4	43.7	28	109.3	79.3	21	6
VHEF-L-M52-E-G18				G1/8							
VHEF-L-M52-M-G14				G1/4							
VHEF-L-M52-E-G14				G1/4							




Type	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11
VHEF-L-M52-M-G18	120	67.7	60.5	37.5	77.5	35.8	19.6	17	18	13.2	9
VHEF-L-M52-E-G18					85.8		27.6	22.5	24.3	22.2	12.2
VHEF-L-M52-M-G14	136.6	72	63.3	37.5	85.8	35.8	27.6	22.5	24.3	22.2	12.2
VHEF-L-M52-E-G14					85.8		27.6	22.5	24.3	22.2	12.2


Data sheet – Finger lever valve

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	Mechanical spring	750	156	4500009	VHEF-LT-M32-M-G18
		870	150	4500008	VHEF-LT-M32-M-G14
5/2-way valve	Mechanical spring	750	185	4500001	VHEF-L-M52-M-G18
	Pneumatic spring		184	4500005	VHEF-L-M52-E-G18
	Mechanical spring	1200	218	4500000	VHEF-L-M52-M-G14
	Pneumatic spring		217	4500004	VHEF-L-M52-E-G14

Manually operated valves VHEF

Data sheet – Hand lever valve, sideways

-  Flow rate
530 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

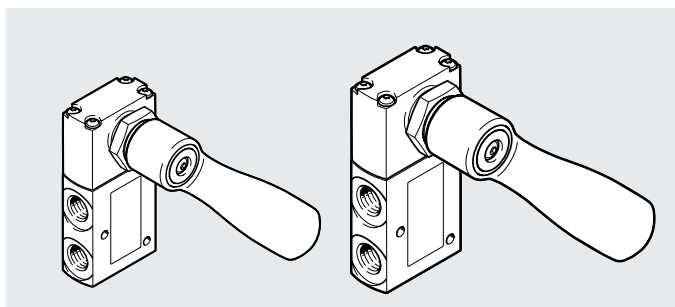

General technical data

Design	Hand lever, sideways
Width [mm]	20
Type of control	Directly actuated
Note regarding use	Actuate manually only The hand lever valve can be turned 90° when mounting on the axis.
Actuation type	Manual
Type of mounting	Via through-hole or front panel using retaining nut
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. force when actuating the hand lever ¹⁾ [N]	200
Max. lateral force when actuating the hand lever ¹⁾ [N]	200
Max. switching frequency [Hz]	0.5

1) Determined at a distance of 80 mm from the centre of the hand lever fitting

Technical data – 3/2-way valve

Type	VHEF-HST-B32...18	VHEF-HST-B32...14	VHEF-HST-M32...18	VHEF-HST-M32...14
Version	Disc seat valve			
Standard nominal flow rate $1 \rightarrow 2$ [l/min]	750	870	750	870
flow rate $3 \rightarrow 2$ [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	-		Mechanical spring	
Manual override	Detenting		-	
Actuating torque at 6 bar [Nm]	0.7		0.6	
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.6	6	5.6	6

Data sheet – Hand lever valve, sideways

Technical data – 5/2-way valve					
Type	VHEF-HS-M52-M-...18	VHEF-HS-M52-M-...14	VHEF-HS-B52-...18	VHEF-HS-B52-...14	
Version	Piston slide				
Standard nominal flow rate	1 → 2 [l/min]	750	1200	750	1200
Valve function	5/2-way valve, monostable		5/2-way valve, bistable		
Lap	Overlap		Overlap		
Reset method	Mechanical spring		–		
Manual override	–		Detenting		
Actuating torque at 6 bar	[Nm]	0.6			
Pneumatic connection	1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4
Nominal width	[mm]	5.2	7	5.2	7

Technical data – 5/3-way valve										
Type VHEF-HS-	B53C-...18	B53C-...14	B53E-...18	B53E-...14	P53C-...18	P53C-...14	P53E-...18	P53E-...14		
Version	Piston slide									
Standard nominal flow rate	1 → 2 [l/min]	750	1200	530	900	700	1200	530	900	
	4 → 5 [l/min]	–	–	400	470	–	–	400	470	
	2 → 3 [l/min]	–	–	400	470	–	–	400	470	
Valve function	5/3-way valve, closed		5/3-way valve, exhausted		5/3-way valve, closed		5/3-way valve, exhausted			
Lap	Overlap		Overlap		Overlap		Overlap			
Reset method	–		–		Mechanical spring		Mechanical spring			
Manual override	Detenting		Detenting		–		–			
Actuating torque at 6 bar	[Nm]	0.7								
Pneumatic connection	1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	
Nominal width	[mm]	5.2	7	5.2	7	5.2	7	5.2	7	

Materials	
Housing	Anodised wrought aluminium alloy
Lever	Reinforced PA
Cover	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant

Operating and environmental conditions		
Operating medium	Compressed air to ISO 8573-1:2010 [7:--:-]	
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Operating pressure range	[bar]	–0.95 ... 10
	[psi]	–14 ... 145
Temperature of medium	[°C]	–10 ... +60
Ambient temperature	[°C]	–10 ... +60
Corrosion resistance CRC ¹⁾		1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070


Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Hand lever valve, sideways

Dimensions

Download CAD data → www.festo.com

3/2-way valve

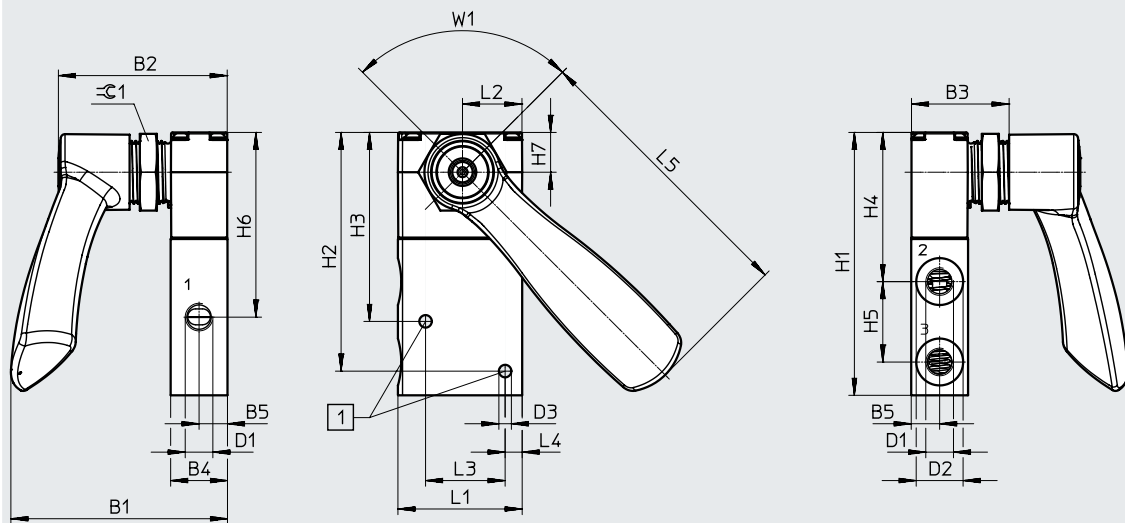

[1] Mounting holes for screws M4

Type	B1	B2	B3	B4	B5	D1	D2 ∅	D3 ∅	H1	H2	H3
VHEF-HST...32...-G18	76.2	59.5	34.5	20	10	G1/8	16.5	4.4	92.5	84	66.5
VHEF-HST...32...-G14						G1/4					


Type	H4	H5	H6	H7	L1	L2	L3	L4	L5	W1	∠ 1
VHEF-HST...32...-G18	52.5	28.3	65	14	43.7	20.9	28	6	100.8	90°	A/F 27
VHEF-HST...32...-G14											

Data sheet – Hand lever valve, sideways

Dimensions

Download CAD data → www.festo.com

5/2-way and 5/3-way valve

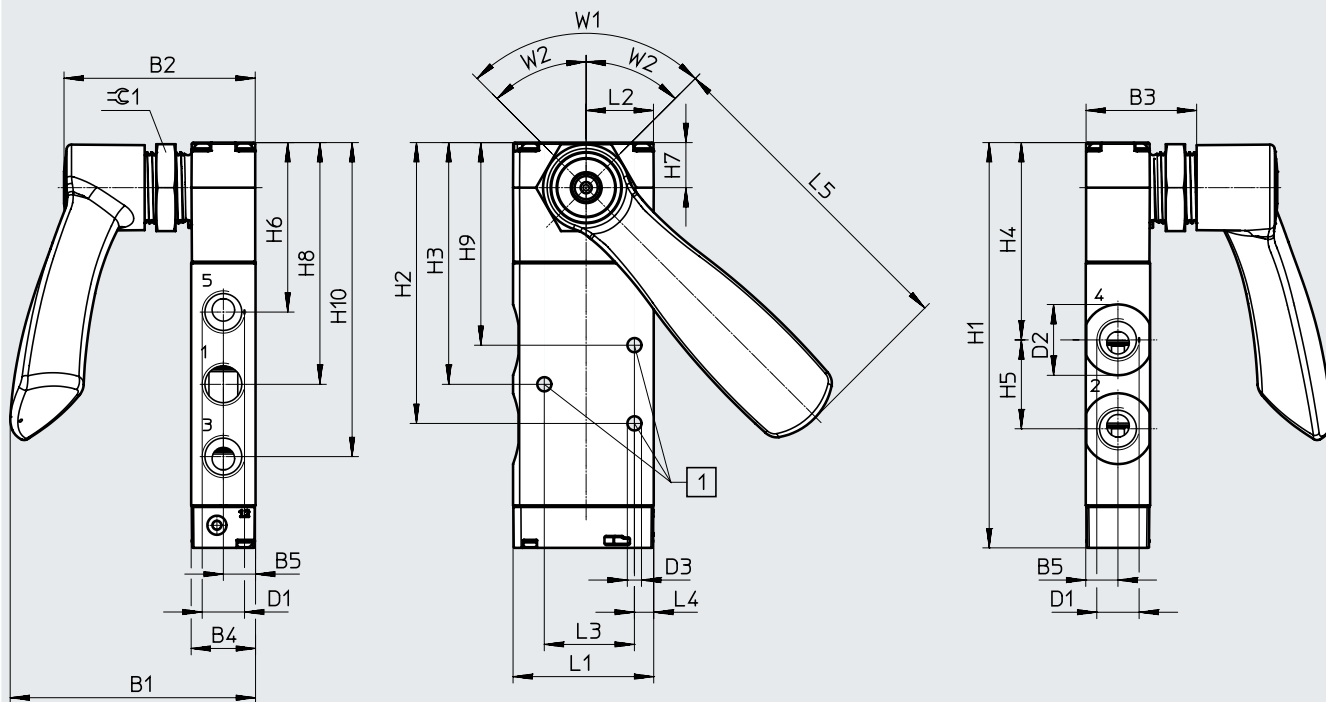

[1] Mounting holes for screws M4

W1 Angle 90° for 5/2-way valves (2 switching positions)

W2 Angle 2x45° for 5/3-way valves (3 switching positions)




Type	B1	B2	B3	B4	B5	D1	D2 ø	D3 ø	H1	H2	H3	H4
VHEF-HS...52...-G18	76.2	59.5	34.5	20	10	G1/8	16.5	4.4	109.4	75.9	66.9	57.1
VHEF-HS...53...-G18						G1/8						
VHEF-HS...52...-G14						G1/4	22	125.9	87.3	75.1	61.3	
VHEF-HS...53...-G14						G1/4						


Type	H5	H6	H7	H8	H9	H10	L1	L2	L3	L4	W1	W2	≅C1
VHEF-HS...52...-G18	19.6	49.9	14	66.9	57.9	83.9	43.7	20.9	28	6	90°	-	A/F 27
VHEF-HS...53...-G18				75.1	63						97.6	90°	
VHEF-HS...52...-G14	26.7	52.7	14	75.1	63	97.6	43.7	20.9	28	6	90°	-	
VHEF-HS...53...-G14				75.1	63						97.6	90°	

Data sheet – Hand lever valve, sideways

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	236	4165861	VHEF-HST-B32-G18
		870	230	4165862	VHEF-HST-B32-G14
	Mechanical spring	750	236	4165853	VHEF-HST-M32-M-G18
		870	230	4165854	VHEF-HST-M32-M-G14
5/2-way valve	Mechanical spring	750	265	4165855	VHEF-HS-M52-M-G18
		1200	298	4165856	VHEF-HS-M52-M-G14
	–	750	265	4165863	VHEF-HS-B52-G18
		1200	298	4165864	VHEF-HS-B52-G14
5/3-way valve	–	700	265	4165865	VHEF-HS-B53C-G18
		1200	298	4165866	VHEF-HS-B53C-G14
		530	265	4165867	VHEF-HS-B53E-G18
		900	298	4165868	VHEF-HS-B53E-G14
	Mechanical spring	700	265	4165857	VHEF-HS-P53C-M-G18
		1200	298	4165858	VHEF-HS-P53C-M-G14
		530	265	4165859	VHEF-HS-P53E-M-G18
		900	298	4165860	VHEF-HS-P53E-M-G14

Data sheet – Hand lever valve

-  Flow rate
530 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

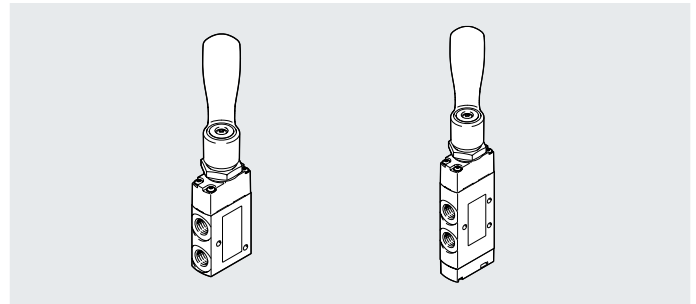
General technical data

Design	Hand lever
Width [mm]	20
Type of control	Directly actuated
Note regarding use	Actuate manually only The hand lever valve can be turned 90° when mounting on the axis.
Actuation type	Manual
Type of mounting	Via through-hole or front panel using retaining nut
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. force when actuating the hand lever ¹⁾ [N]	200
Max. lateral force when actuating the hand lever ¹⁾ [N]	200
Max. switching frequency [Hz]	0.5

1) Determined at a distance of 80 mm from the centre of the hand lever fitting

Technical data – 3/2-way valve

Type	VHEF-HT-B32...18	VHEF-HT-B32...14	VHEF-HT-M32...18	VHEF-HT-M32...14
Version	Disc seat valve			
Standard nominal flow rate $1 \rightarrow 2$ [l/min]	750	870	750	870
flow rate $3 \rightarrow 2$ [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	–		Mechanical spring	
Manual override	Detenting		–	
Actuating torque at 6 bar [Nm]	0.7		0.6	
Release torque at 6 bar [Nm]	0.4	0.4	–	–
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.6	6	5.6	6

Data sheet – Hand lever valve

Technical data – 5/2-way valve				VHEF-H-M52-M-...18	VHEF-H-M52-M-...14	VHEF-H-B52-...18	VHEF-H-B52-...14
Type							
Version				Piston slide			
Standard nominal flow rate	1 → 2	[l/min]		750	1200	750	1200
Valve function				5/2-way valve, monostable		5/2-way valve, bistable	
Lap				Overlap		Overlap	
Reset method				Mechanical spring		–	
Manual override				–	–	Detenting	Detenting
Actuating torque at 6 bar		[Nm]		0.6		0.6	
Release torque at 6 bar		[Nm]		–	–	0.5	0.5
Pneumatic connection				G1/8	G1/4	G1/8	G1/4
1, 2, 3, 4, 5							
Nominal width		[mm]		5.2	7	5.2	7

Technical data – 5/3-way valve										
Type VHEF-HS-	B53C-...18	B53C-...14	B53E-...18	B53E-...14	P53C-...18	P53C-...14	P53E-...18	P53E-...14		
Version	Piston slide									
Standard nominal flow rate	1 → 2	[l/min]	700	1200	530	900	700	1200	530	900
	4 → 5	[l/min]	–	–	400	470	–	–	400	470
	2 → 3	[l/min]	–	–	400	470	–	–	400	470
Valve function	5/3-way valve, closed			5/3-way valve, exhausted		5/3-way valve, closed		5/3-way valve, exhausted		
Lap	Overlap			Overlap		Overlap		Overlap		
Reset method	–			–		Mechanical spring		Mechanical spring		
Manual override	Detenting			Detenting		–		–		
Actuating torque at 6 bar		[Nm]	0.7				0.7			
Release torque at 6 bar		[Nm]	0.6	0.6	0.6	0.6	–	–	–	–
Pneumatic connection	G1/8		G1/4		G1/8		G1/4		G1/8	G1/4
1, 2, 3, 4, 5										
Nominal width		[mm]	5.2	7	5.2	7	5.2	7	5.2	7

Data sheet – Hand lever valve

Materials	
Housing	Anodised wrought aluminium alloy
Lever	Reinforced PA
Cover	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant
Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/ pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure range	[bar] -0.95 ... 10
	[psi] -14 ... 145
Temperature of medium	[°C] -10 ... +60
Ambient temperature	[°C] -10 ... +60
Corrosion resistance CRC ¹⁾	1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070


Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Hand lever valve

Dimensions

Download CAD data → www.festo.com

3/2-way valve

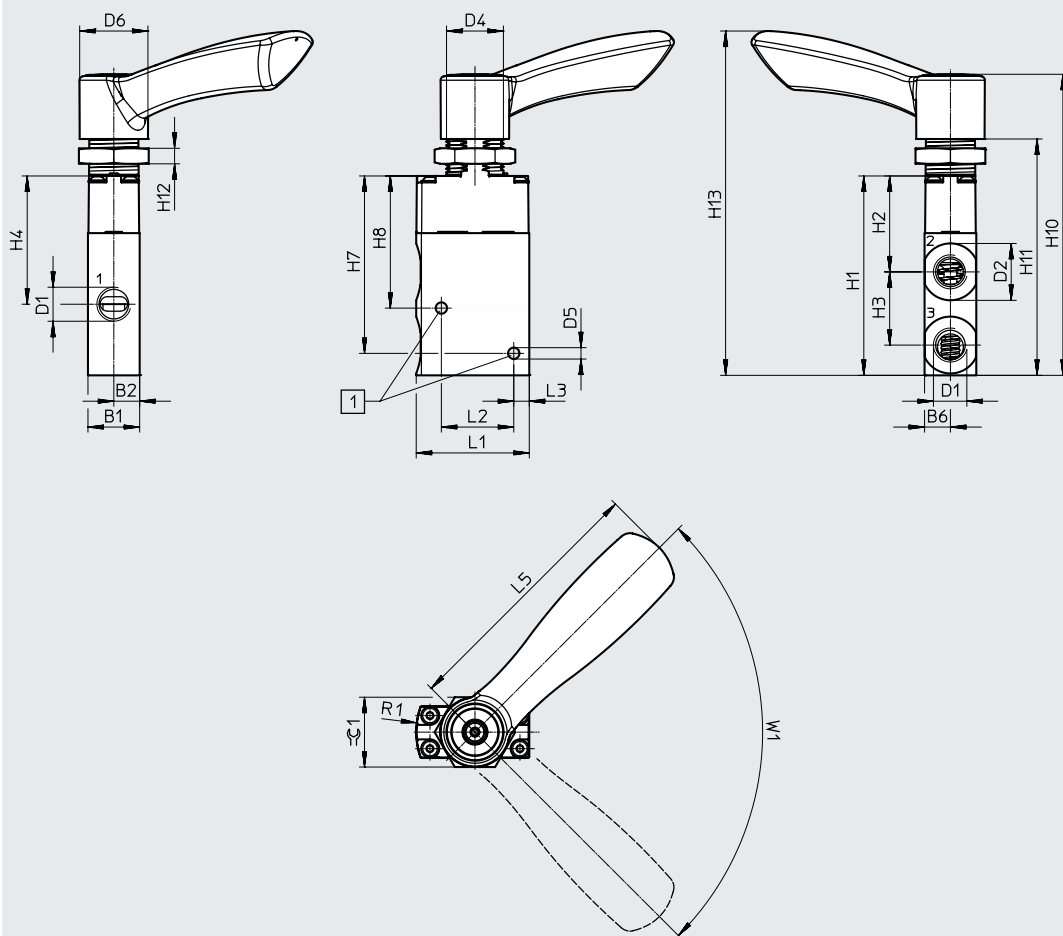

[1] Mounting holes for screws M4

Type	B1	B2	B6	D1	D2 ø	D4	D5 ø	D6 ø	H1	H2	H3	H4	H7
VHEF-HT...32...-G18	20	10	10	G1/8	16.5	M22x1.5	4.4	26.4	77.1	37.1	28.3	49.6	68.6
VHEF-HT...32...-G14				G1/4	22								


Type	H8	H10	H11	H12	H13	L1	L2	L3	L5	R1	W1	⊕ 1
VHEF-HT...32...-G18	51.1	116.4	91.4	6	133.1	43.7	28	6	100.9	30	90°	A/F 27
VHEF-HT...32...-G14												

Data sheet – Hand lever valve

Dimensions

Download CAD data → www.festo.com

5/2-way and 5/3-way valve

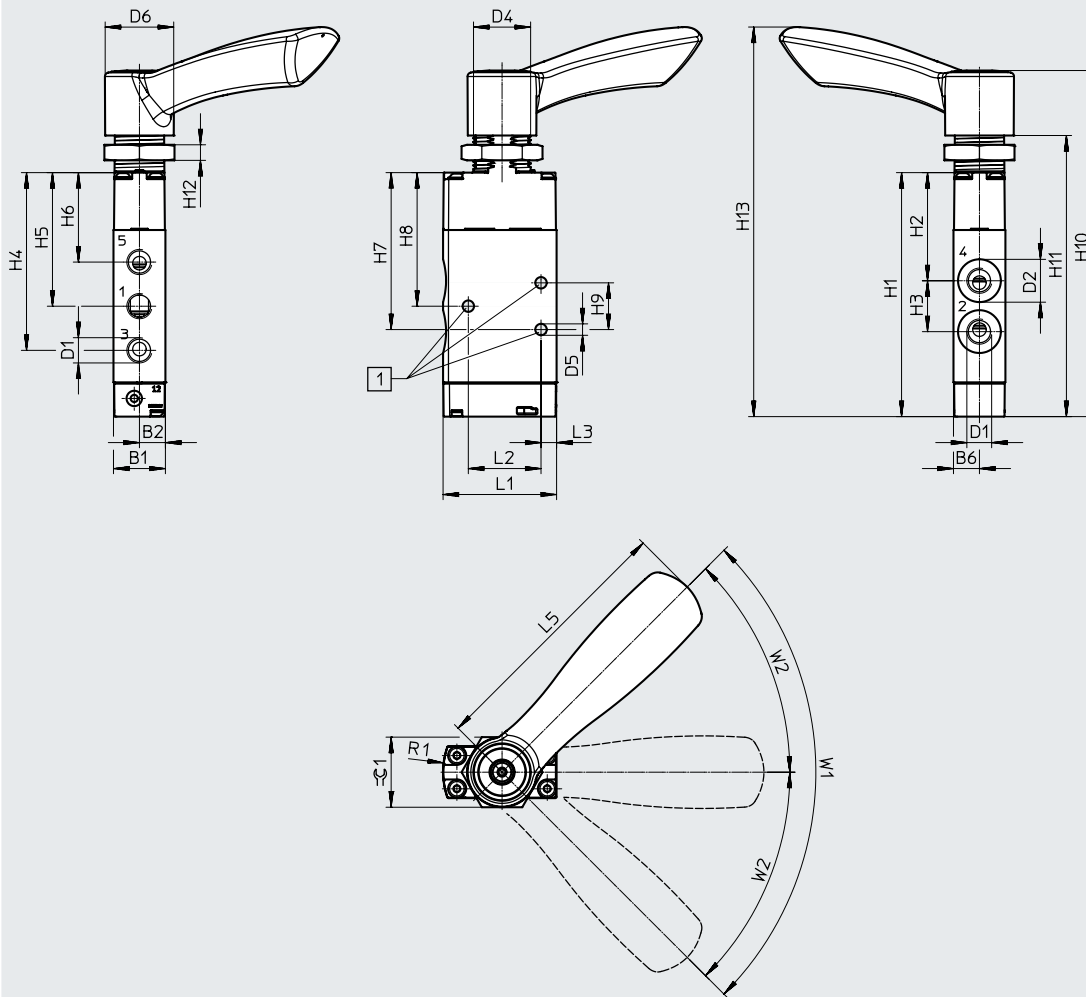

[1] Mounting holes for screws M4

W1 Angle 90° for
5/2-way valves
(2 switching positions)

W2 Angle 2x45° for 5/3-way valves
(3 switching positions)




Type	B1	B2	B6	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6
VHEF-HS...52...-G18	20	10	10	G1/8	16.5	M22x1.5	4.4	26.4	94	41.7	19.6	68.5	51.5	34.5
VHEF-HS...53...-G18				G1/8	22				110.5	45.9	27.6	82.2	59.7	37.3
VHEF-HS...52...-G14				G1/4					110.5	45.9	27.6	82.2	59.7	37.3
VHEF-HS...53...-G14				G1/4										


Type	H7	H8	H9	H10	H11	H12	H13	L1	L2	L3	L5	R1	W1	W2	≈∅ 1
VHEF-HS...52...-G18	60.5	51.5	18	133.3	108.3	6	150	43.7	28	6	100.9	30	90°	-	A/F 27
VHEF-HS...53...-G18													-	45°	
VHEF-HS...52...-G14	71.9	59.7	24.3	149.8	124.8	6	166.5						90°	-	
VHEF-HS...53...-G14													-	45°	

Data sheet – Hand lever valve

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	236	8080940	VHEF-HT-B32-G18
		870	230	8080939	VHEF-HT-B32-G14
	Mechanical spring	750	236	8080936	VHEF-HT-M32-M-G18
		870	230	8081000	VHEF-HT-M32-M-G14
5/2-way valve	–	750	265	8080932	VHEF-H-B52-G18
		1200	298	8080931	VHEF-H-B52-G14
	Mechanical spring	750	265	8081001	VHEF-H-M52-M-G18
		1200	298	8081006	VHEF-H-M52-M-G14
5/3-way valve	–	700	265	8080945	VHEF-H-B53C-G18
		1200	298	8080943	VHEF-H-B53C-G14
		530	265	8080948	VHEF-H-B53E-G18
		900	298	8080947	VHEF-H-B53E-G14
	Mechanical spring	700	265	8080952	VHEF-H-P53C-M-G18
		1200	298	8080951	VHEF-H-P53C-M-G14
		530	265	8080956	VHEF-H-P53E-M-G18
		900	298	8080955	VHEF-H-P53E-M-G14

Data sheet – Selector valve, sideways

-  Flow rate
530 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

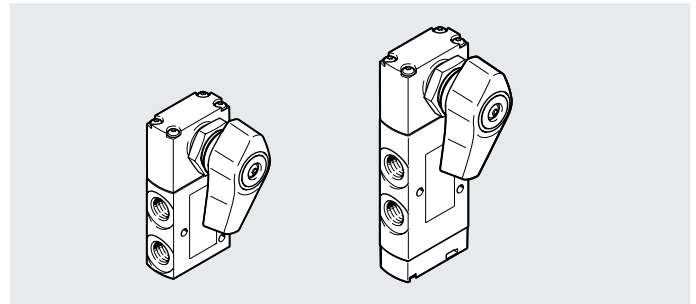
General technical data

Design	Selector switch, sideways	
Width [mm]	20	
Type of control	Directly actuated	
Note regarding use	Actuate manually only The hand lever valve can be turned 90° when mounting on the axis.	
Actuation type	Manual	
Type of mounting	Via through-hole or front panel using retaining nut	
Sealing principle	Soft	
Flow direction	Reversible	
Exhaust function	With flow control option	
Mounting position	Any	
Max. force when actuating the hand lever ¹⁾ [N]	200	
Max. lateral force when actuating the hand lever ¹⁾ [N]	200	
Max. switching frequency [Hz]	0.5	

1) Determined at a distance of 30 mm from the centre of the selector switch fitting

Technical data – 3/2-way valve

Type	VHEF-EST-B32...18	VHEF-EST-B32...14	VHEF-EST-M32...18	VHEF-EST-M32...14
Version	Disc seat valve			
Standard nominal flow rate $1 \rightarrow 2$ [l/min]	750	870	750	870
flow rate $3 \rightarrow 2$ [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	-		Mechanical spring	
Manual override	Detenting		-	
Actuating torque at 6 bar [Nm]	0.4		0.4	
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.6	6	5.6	6

Data sheet – Selector valve, sideways

Technical data – 5/2-way valve					
Type	VHEF-ES-M52-M-...18	VHEF-ES-M52-M-...14	VHEF-ES-B52-...18	VHEF-ES-B52-...14	
Version	Piston slide				
Standard nominal flow rate	1 → 2 [l/min]	750	1200	750	1200
Valve function	5/2-way valve, monostable		5/2-way valve, bistable		
Lap	Overlap		Overlap		
Reset method	Mechanical spring		–		
Manual override	–		Detenting		
Actuating torque at 6 bar	[Nm]	0.3	0.2		
Pneumatic connection	1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4
Nominal width	[mm]	5.2	7	5.2	7

Technical data – 5/3-way valve										
Type VHEF-ES-	B53C-...18	B53C-...14	B53E-...18	B53E-...14	P53C-...18	P53C-...14	P53E-...18	P53E-...14		
Version	Piston slide									
Standard nominal flow rate	1 → 2 [l/min]	700	1200	530	900	700	1200	530	900	
	4 → 5 [l/min]	–	–	400	470	–	–	400	470	
	2 → 3 [l/min]	–	–	400	470	–	–	400	470	
Valve function	5/3-way valve, closed			5/3-way valve, exhausted		5/3-way valve, closed		5/3-way valve, exhausted		
Lap	Overlap			Overlap		Overlap		Overlap		
Reset method	–			–		Mechanical spring		Mechanical spring		
Manual override	Detenting			Detenting		–		–		
Actuating torque at 6 bar	[Nm]	0.3			0.7		–			
Pneumatic connection	1, 2, 3, 4, 5	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	
Nominal width	[mm]	5.2	7	5.2	7	5.2	7	5.2	7	

Materials	
Housing	Anodised wrought aluminium alloy
Lever	Reinforced PA
Cover	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant

Operating and environmental conditions		
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]	
Note on operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Operating pressure range	[bar]	–0.95 ... 10
	[psi]	–14 ... 145
Temperature of medium	[°C]	–10 ... +60
Ambient temperature	[°C]	–10 ... +60
Corrosion resistance CRC ¹⁾		1


1) Corrosion resistance class CRC 1 to Festo standard FN 940070
 Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Selector valve, sideways

Dimensions

Download CAD data → www.festo.com

3/2-way valve

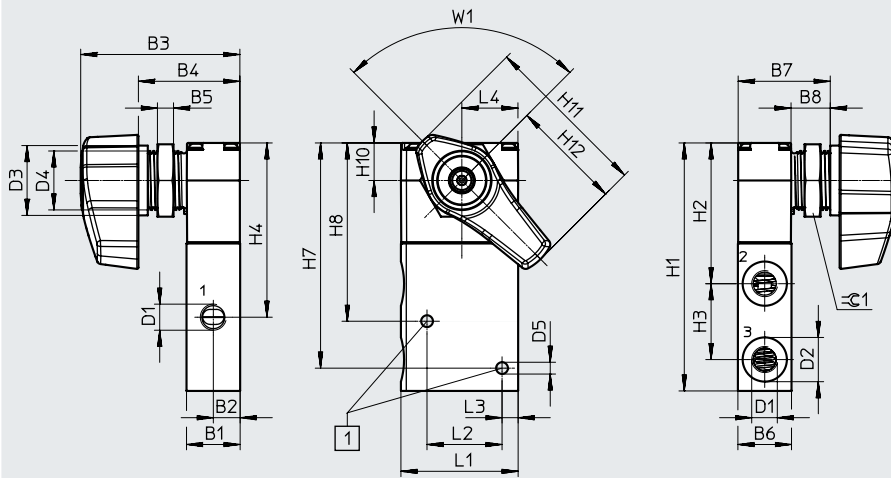

[1] Mounting holes for screws M4

Type	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2 ∅	D3 ∅	D4	D5 ∅	H1
VHEF-EST...32...G18	20	10	59.4	38	6	10	34.5	14.6	G1/8	16.5	26	M22x1.5	4.4	92.5
VHEF-EST...32...G14									G1/4	22				


Type	H2	H3	H4	H7	H8	H10	H11	H12	L1	L2	L3	L4	W1	⊕ 1
VHEF-EST...32...G18	52.5	28.3	65	84	66.5	14	62.2	41.5	43.7	28	6	20.9	90°	A/F 27
VHEF-EST...32...G14														

Data sheet – Selector valve, sideways

Dimensions

Download CAD data → www.festo.com

5/2-way and 5/3-way valve

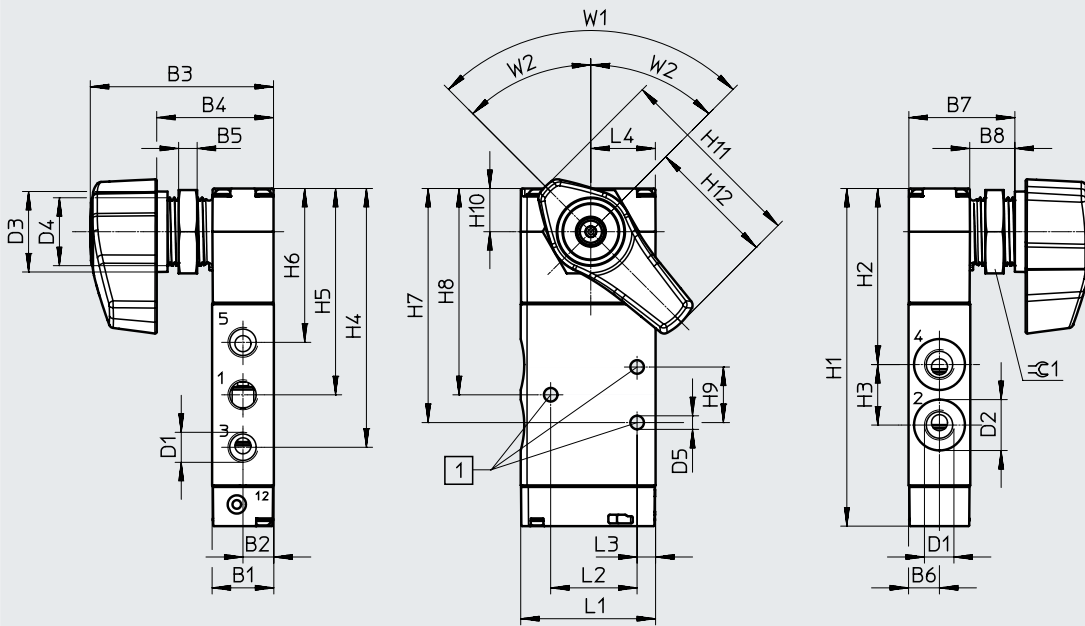

[1] Mounting holes for screws M4

W1 Angle 90° for 5/2-way valves (2 switching positions)

W2 Angle 2x45° for 5/3-way valves (3 switching positions)




Type	B1	B2	B3	B4	B5	B6	B7	B8	D1	D2 ∅	D3 ∅	D4	D5 ∅	H1	H2	H3
VHEF-ES...52...-G18	20	10	59.4	38	6	10	34.5	14.6	G1/8	16.5	26	M22x1.5	4.4	109.4	57.1	19.6
VHEF-ES...53...-G18									G1/8							
VHEF-ES...52...-G14									G1/4	22	125.9			61.3	27.6	
VHEF-ES...53...-G14									G1/4							


Type	H4	H5	H6	H7	H8	H9	H10	H11	H12	L1	L2	L3	L4	W1	W2	≈ 1
VHEF-ES...52...-G18	83.9	66.9	49.9	75.9	66.9	18	14	62.2	41.5	43.7	28	6	20.9	90°	-	A/F 27
VHEF-ES...53...-G18														-	45°	
VHEF-ES...52...-G14	97.6	75.1	52.7	87.3	75.1	24.3								90°	-	
VHEF-ES...53...-G14														-	45°	

Data sheet – Selector valve, sideways

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	206	4106814	VHEF-EST-B32-G18
		870	200	4106815	VHEF-EST-B32-G14
	Mechanical spring	750	206	4106806	VHEF-EST-M32-M-G18
		870	200	4106807	VHEF-EST-M32-M-G14
5/2-way valve	Mechanical spring	750	235	4106808	VHEF-ES-M52-M-G18
		1200	268	4106809	VHEF-ES-M52-M-G14
	–	750	235	4106816	VHEF-ES-B52-G18
		1200	268	4106817	VHEF-ES-B52-G14
5/3-way valve	–	700	235	4106818	VHEF-ES-B53C-G18
		1200	268	4106819	VHEF-ES-B53C-G14
		530	235	4106820	VHEF-ES-B53E-G18
		900	268	4106821	VHEF-ES-B53E-G14
	Mechanical spring	700	235	4106810	VHEF-ES-P53C-M-G18
		1200	268	4106811	VHEF-ES-P53C-M-G14
		530	235	4106812	VHEF-ES-P53E-M-G18
		900	268	4106813	VHEF-ES-P53E-M-G14

Data sheet – Selector valve

-  Flow rate
530 ... 1200 l/min
-  Pressure
-0.95 ... 10 bar
-  Temperature range
-10 ... +60°C

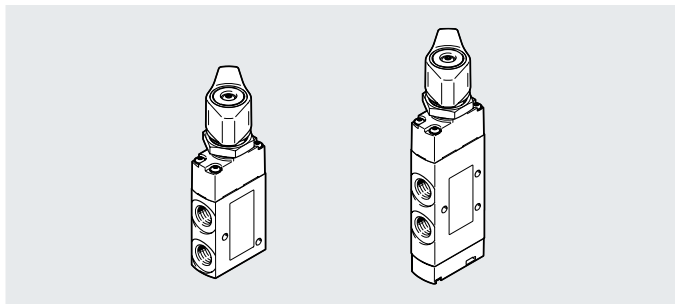

General technical data

Design	Selector switch
Width [mm]	20
Type of control	Directly actuated
Note regarding use	Actuate manually only The hand lever valve can be turned 90° when mounting on the axis.
Actuation type	Manual
Type of mounting	Via through-hole or front panel using retaining nut
Sealing principle	Soft
Flow direction	Reversible
Exhaust function	With flow control option
Mounting position	Any
Max. force when actuating the hand lever ¹⁾ [N]	200
Max. lateral force when actuating the hand lever ¹⁾ [N]	200
Max. switching frequency [Hz]	0.5

1) Determined at a distance of 30 mm from the centre of the selector switch fitting

Technical data – 3/2-way valve

Type	VHEF-ET-B32...18	VHEF-ET-B32...14	VHEF-ET-M32...18	VHEF-ET-M32...14
Version	Disc seat valve			
Standard nominal flow rate 1 → 2 [l/min]	750	870	750	870
flow rate 3 → 2 [l/min]	665	750	665	750
Valve function	3/2-way valve, bistable		3/2-way valve, open/closed, monostable	
Lap	Zero overlap		Zero overlap	
Reset method	-		Mechanical spring	
Manual override	Detenting		-	
Actuating torque at 6 bar [Nm]	0.7		0.4	
Release torque at 6 bar [Nm]	0.4	0.4	-	-
Pneumatic connection 1, 2, 3	G1/8	G1/4	G1/8	G1/4
Nominal width [mm]	5.6	6	5.6	6

Data sheet – Selector valve

Technical data – 5/2-way valve			VHEF-E-M52-M-...18		VHEF-E-M52-M-...14		VHEF-E-B52-...18		VHEF-E-B52-...14	
Type										
Version			Piston slide							
Standard nominal flow rate	1 → 2	[l/min]	750	1200	750	1200	750	1200	750	1200
Valve function	5/2-way valve, monostable				5/2-way valve, bistable					
Lap	Overlap				Overlap					
Reset method	Mechanical spring				–					
Manual override			–		–		Detenting		Detenting	
Actuating torque at 6 bar		[Nm]	0.3		0.3		0.3		0.3	
Release torque at 6 bar		[Nm]	–		–		0.3		0.3	
Pneumatic connection	1, 2, 3, 4, 5		G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4
Nominal width		[mm]	5.2	7	5.2	7	5.2	7	5.2	7

Technical data – 5/3-way valve			B53C-...18		B53C-...14		B53E-...18		B53E-...14		P53C-...18		P53C-...14		P53E-...18		P53E-...14	
Type	VHEF-E-																	
Version			Piston slide															
Standard nominal flow rate	1 → 2	[l/min]	700	1200	530	900	700	1200	530	900	700	1200	530	900	700	1200	530	900
	4 → 5	[l/min]	–	–	400	470	–	–	400	470	–	–	400	470	–	–	400	470
	2 → 3	[l/min]	–	–	400	470	–	–	400	470	–	–	400	470	–	–	400	470
Valve function	5/3-way valve, closed				5/3-way valve, exhausted				5/3-way valve, closed				5/3-way valve, exhausted					
Lap	Overlap				Overlap				Overlap				Overlap					
Reset method	–				–				Mechanical spring				Mechanical spring					
Manual override	Detenting				Detenting				–				–					
Actuating torque at 6 bar		[Nm]	0.4				0.7				0.7				0.7			
Release torque at 6 bar		[Nm]	0.4	0.4	0.4	0.4	–	–	–	–	–	–	–	–	–	–	–	–
Pneumatic connection	1, 2, 3, 4, 5		G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4	G1/8	G1/4
Nominal width		[mm]	5.2	7	5.2	7	5.2	7	5.2	7	5.2	7	5.2	7	5.2	7	5.2	7

Data sheet – Selector valve

Materials	
Housing	Anodised wrought aluminium alloy
Lever	Reinforced PA
Cover	Reinforced PA
Seal	NBR
Note on materials	RoHS-compliant
Operating and environmental conditions	
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Note on operating/ pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)
Operating pressure range	[bar] -0.95 ... 10
	[psi] -14 ... 145
Temperature of medium	[°C] -10 ... +60
Ambient temperature	[°C] -10 ... +60
Corrosion resistance CRC ¹⁾	1

1) Corrosion resistance class CRC 1 to Festo standard FN 940070


Low corrosion stress. Dry internal application or transport and storage protection. Also applies to parts behind coverings, in the non-visible interior area, and parts which are covered in the application (e.g. drive trunnions).

Data sheet – Selector valve

Dimensions

Download CAD data → www.festo.com

3/2-way valve

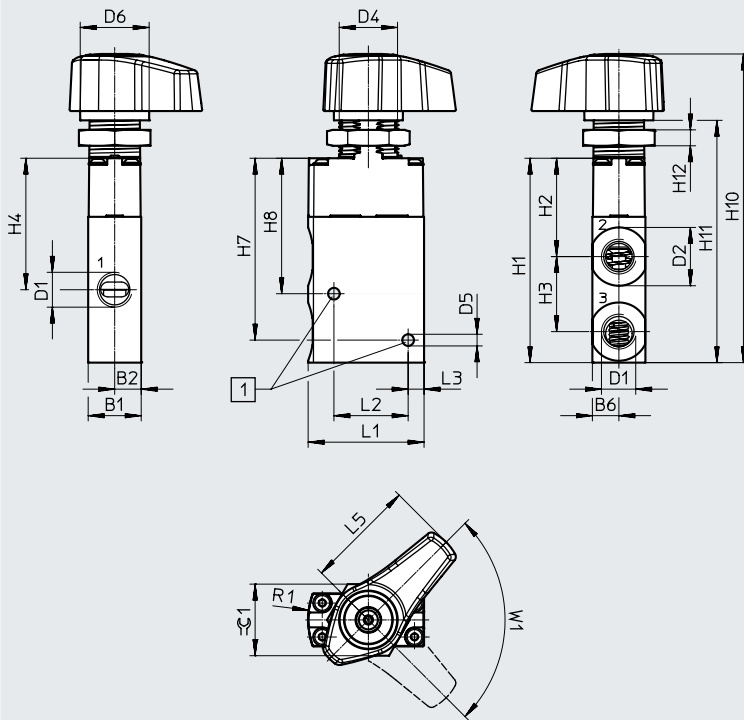

[1] Mounting holes for screws M4

Type	B1	B2	B6	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4
VHEF-ET...32...G18	20	10	10	G1/8	16.5	M22x1.5	4.4	26	77.1	37.1	28.3	49.6
VHEF-ET...32...G14				G1/4	22							


Type	H7	H8	H10	H11	H12	L1	L2	L3	L5	R1	W1	⊕ 1
VHEF-ET...32...G18	68.6	51.1	116.5	91.5	6	43.7	28	6	41.5	30	90°	A/F 27
VHEF-ET...32...G14												

Data sheet – Selector valve

Dimensions

Download CAD data → www.festo.com

5/2-way and 5/3-way valve

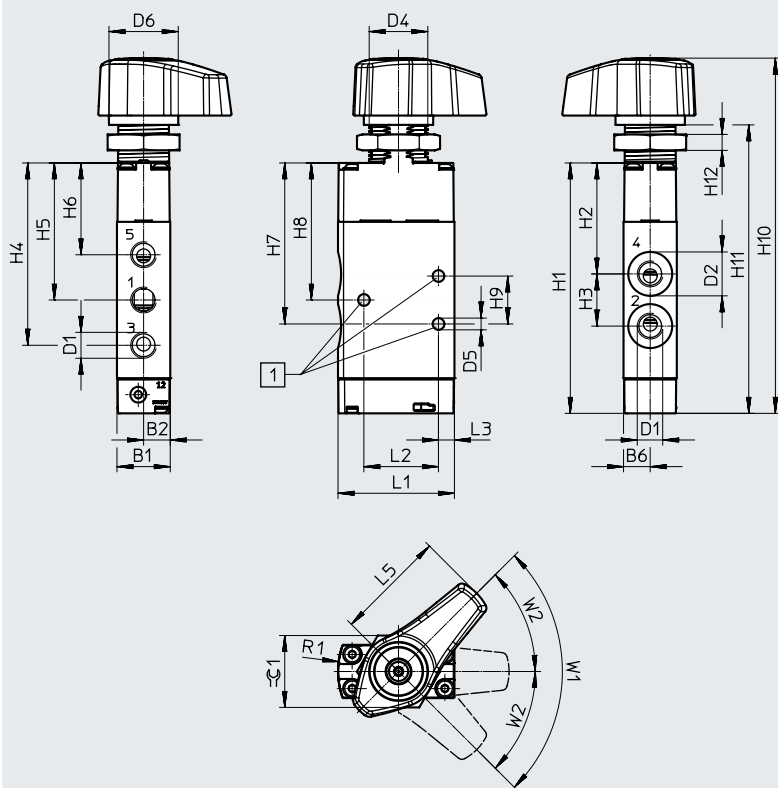

[1] Mounting holes for screws M4

W1 Angle 90° for 5/2-way valves (2 switching positions)

W2 Angle 2x45° for 5/3-way valves (3 switching positions)







Type	B1	B2	B6	D1	D2 ∅	D4	D5 ∅	D6 ∅	H1	H2	H3	H4	H5	H6
VHEF-E...52...-G18	20	10	10	G1/8	16.5	M22x1.5	4.4	26	94	41.7	19.6	68.5	51.5	34.5
VHEF-E...53...-G18				G1/8										
VHEF-E...52...-G14				G1/4	22				110.5	45.9	27.6	82.2	59.7	37.3
VHEF-E...53...-G14				G1/4										

Type	H7	H8	H9	H10	H11	H12	L1	L2	L3	L5	R1	W1	W2	⊙ 1
VHEF-E...52...-G18	60.5	51.5	18	133.3	108.3	6	43.7	28	6	41.5	30	90°	-	A/F 27
VHEF-E...53...-G18												-	45°	
VHEF-E...52...-G14	71.9	59.7	24.3	149.8	124.8							90°	-	
VHEF-E...53...-G14												-	45°	

Data sheet – Selector valve

Ordering data					
Description	Reset method	Nominal flow rate [l/min]	Weight [g]	Part no.	Type
3/2-way valve	–	750	206	8080964	VHEF-ET-B32-G18
		870	200	8080963	VHEF-ET-B32-G14
	Mechanical spring	750	206	8080968	VHEF-ET-M32-M-G18
		870	200	8080967	VHEF-ET-M32-M-G14
5/2-way valve	–	750	235	8080960	VHEF-E-B52-G18
		1200	268	8080959	VHEF-E-B52-G14
	Mechanical spring	750	235	8080972	VHEF-E-M52-M-G18
		1200	268	8080971	VHEF-E-M52-M-G14
5/3-way valve	–	700	235	8080976	VHEF-E-B53C-G18
		1200	268	8080975	VHEF-E-B53C-G14
		530	235	8080980	VHEF-E-B53E-G18
		900	268	8080979	VHEF-E-B53E-G14
	Mechanical spring	700	235	8080984	VHEF-E-P53C-M-G18
		1200	268	8080983	VHEF-E-P53C-M-G14
		530	235	8080988	VHEF-E-P53E-M-G18
		900	268	8080987	VHEF-E-P53E-M-G14

Accessories

Ordering data	Description	Part no.	Type	PU ¹⁾	
Push-in fitting, straight					
	With external hex	Connecting thread G1/4 for tubing O.D.	12 mm	186350 QS-G1/4-12 10	
	With internal hex	Connecting thread M5 for tubing O.D.	4 mm	153315 QSM-M5-4-I 10	
			Connecting thread G1/8 for tubing O.D.	4 mm	186106 QS-G1/8-4-I 10
				133008 QS-G1/8-4-I-100 100	
		6 mm		186107 QS-G1/8-6-I 10	
				133009 QS-G1/8-6-I-100 100	
		8 mm		186109 QS-G1/8-8-I 10	
				133010 QS-G1/8-8-I-100 100	
		Connecting thread G1/4 for tubing O.D.	8 mm	186110 QS-G1/4-8-I 10	
10 mm	186112 QS-G1/4-10-I 10				
Push-in fitting, angled					
	With external hex	Connecting thread G1/8 for tubing O.D.	4 mm	186116 QSL-G1/8-4 10	
				132048 QSL-G1/8-4-100 100	
			6 mm	186117 QSL-G1/8-6 10	
				132049 QSL-G1/8-6-100 100	
		Connecting thread G1/4 for tubing O.D.	8 mm	186119 QSL-G1/8-8 10	
				132050 QSL-G1/8-8-50 50	
		Connecting thread G1/4 for tubing O.D.	8 mm	186120 QSL-G1/4-8 10	
				132052 QSL-G1/4-8-50 50	
			10 mm	186122 QSL-G1/4-10 10	
				132053 QSL-G1/4-10-50 50	
Connecting thread G1/4 for tubing O.D.	12 mm	186351 QSL-G1/4-12 10			
		132054 QSL-G1/4-12-20 20			
	Push-in fitting, angled, long				
		With external hex	Connecting thread G1/8 for tubing O.D.	4 mm	186127 QSL-G1/8-4 10
					133015 QSL-G1/8-4-100 100
				6 mm	186128 QSL-G1/8-6 10
				133016 QSL-G1/8-6-100 100	
8 mm				186130 QSL-G1/8-8 10	
				133017 QSL-G1/8-8-100 100	
Silencer					
	Polymer design	With connecting thread	G1/8	2307 U-1/8 1	
				534222 U-1/8-50 50	
			G1/4	2316 U-1/4 1	
				534223 U-1/4-20 20	
	Metal version	With connecting thread	G1/8	6841 U-1/8-B 1	
			G1/4	6842 U-1/4-B 1	

1) Packaging unit